| WAAS CH 58200 W12A | APP CRS 123° | Rwy Idg 10201 TDZE 1359 Apt Elev 1384 |
|---|---|---|

# RNAV (GPS) RWY 12C
## MESA GATEWAY (IWA)

T DME/DME RNP-0.3 NA.
A For uncompensated Baro-VNAV systems LNAV/VNAV NA below -17°C (2°F) or above 46°C (115°F).

MISSED APPROACH: Climb to 5000 direct PADPE and on 213° track to RIYCO and hold.

| ATIS | PHOENIX APP CON | GATEWAY TOWER * | GND CON | CLNC DEL |
|---|---|---|---|---|
| 133.5 270.275 | 124.9 353.8 | 120.6 (CTAF) 289.4 | 128.25 275.8 | 135.05 |

Procedure NA for arrivals on PXR VORTAC airway radials 321 CW 143.

(IAF) NEVKE
2830
LAKEY
5000
238° (5.8)
4200 NoPT
213° (5)
5 NM
122°
302°
(IF/IAF) OCATU
(IAF) PHOENIX PXR
4200 NoPT
064°
(7.1)
3300
122°
(6)
(FAF) HICHI
123°
2716
3381
3312
2000
3000
4000
5057
1526
1409
RW12C
1465
1474±
1666
1527
2234
MSA RW12C 25 NM
8900
5000
353°
(34.6)
STANFIELD
TFD
Procedure NA for arrivals at TFD VORTAC on V94 eastbound.
PADPE
3104
213°
(15)
MISSED APCH FIX
RIYCO
142°
322°
5 NM

ELEV 1384 D TDZE 1359




MIRL Rwy 12R-30L
HIRL Rwys 12L-30R and 12C-30C
REIL Rwys 12L and 30R

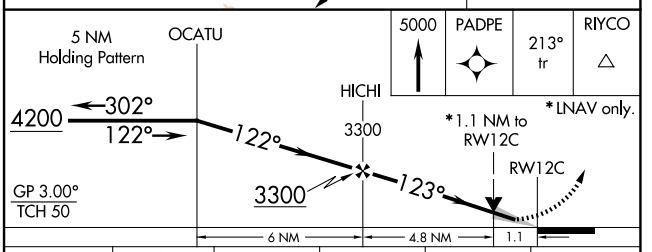


| CATEGORY | A | B | C | D | E |
|---|---|---|---|---|---|
| LPV DA | 1609-1 250 (300-1) | | | | |
| LNAV/VNAV DA | 1686-1¼ 327 (400-1¼) | | | | |
| LNAV MDA | 1740-1 381 (400-1) | | | 1740-1¼ 381 (400-1¼) | |
| CIRCLING | 1840-1¼ 456 (500-1¼) | 1880-1½ 496 (500-1½) | | 2000-2 616 (700-2) | 2020-2¼ 636 (700-2¼) |



SW-4, 15 MAY 2025 to 12 JUN 2025
SW-4, 15 MAY 2025 to 12 JUN 2025