RNAV (GPS) Z RWY 19

KANSAS CITY DOWNTOWN/WHEELER FLD (MKC)

WAAS CH 90320 W19A	APP CRS 192°	Rwy Idg 6526 TDZE 754 Apt Elev 757

RNP APCH-GPS.

T Rwy 19 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to LPV * all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LPV visibility all Cats to RVR 5500.

MALSF

MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 direct MIFEV and on track 236° to YETUK and hold.
*Missed approach requires minimum climb of 300 feet per NM to 1500.
#Missed approach requires minimum climb of 360 feet per NM to 2400.

ATIS	KANSAS CITY APP CON	DOWNTOWN TOWER	CLNC DEL	GND CON
120.75	118.4 307.35	133.3 233.7	121.9	121.9

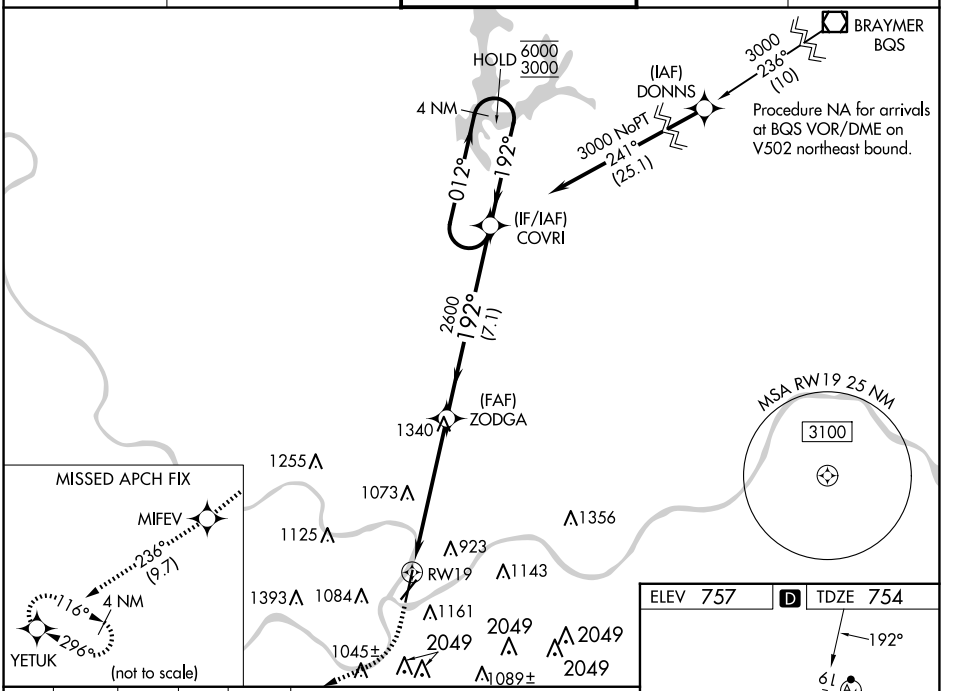

CATEGORY	A	B	C	D
LPV DA*	1004/40	250 (300-¾)		
LPV DA	1097/40	343 (400-¾)		
LNAV/VNAV DA#	1077/40	323 (400-¾)		
LNAV/VNAV DA	1468-1¾	714 (800-1¾)		

NC-3, 15 MAY 2025 to 12 JUN 2025
NC-3, 15 MAY 2025 to 12 JUN 2025