WAAS CH 90529 W04A	APP CRS 045°	Rwy ldg 4605 TDZE 2851 Apt Elev 2872

RNAV (GPS) RWY 4
MIDLAND INTL AIR AND SPACE PORT (MAF)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). Circling Rwy 16L NA at night. Rwy 4 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 4700 direct AYUPA and hold.

ATIS	MIDLAND APP CON★	MIDLAND TOWER★	GND CON	CLNC DEL	UNICOM
126.8 235.975	124.6 290.4	118.7 (CTAF) L 273.45	121.9 348.6	118.05 317.65	122.95

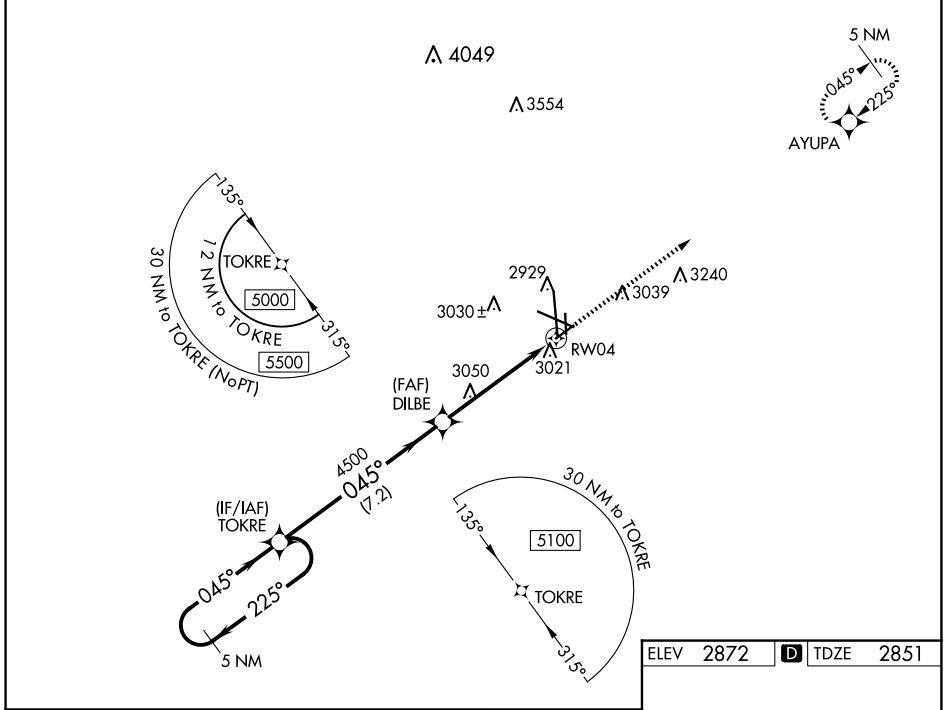

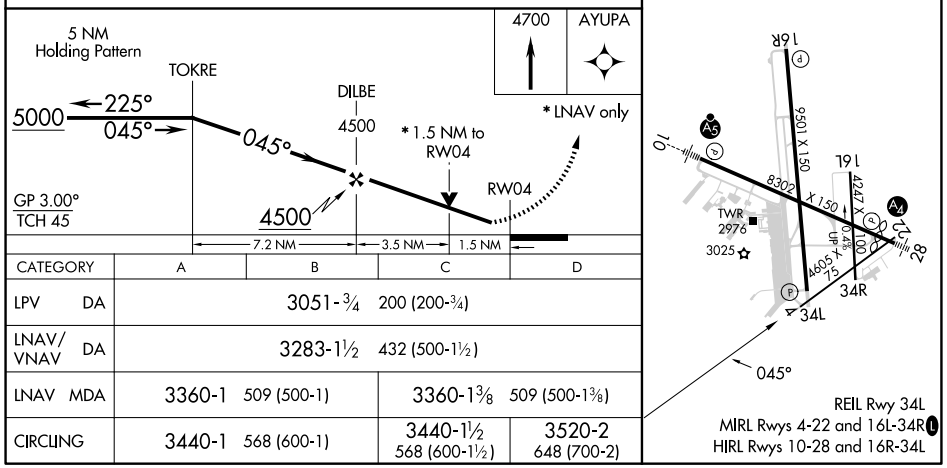

CATEGORY	A	B	C	D
LPV DA	3051-¾ 200 (200-¾)			
LNAV/VNAV DA	3283-1½ 432 (500-1½)			
LNAV MDA	3360-1 509 (500-1)		3360-1⅜ 509 (500-1⅜)	
CIRCLING	3440-1 568 (600-1)		3440-1½ 568 (600-1½)	3520-2 648 (700-2)

SC-3, 15 MAY 2025 to 12 JUN 2025
SC-3, 15 MAY 2025 to 12 JUN 2025