RNAV (RNP) Z RWY 17L

RENO/TAHOE INTL (RNO)

APP CRS	Rwy ldg	9000
167°	TDZE	4415
	Apt Elev	4415

RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 54°C.

MISSED APPROACH: Climb to 13000 on track 167° to ZIDGO and on track 184° to USINE and on track 127° to YARKU and hold, continue climb-in-hold to 13000.
Missed approach requires minimum climb of 203 feet per NM to 5040.
* Missed approach requires minimum climb of 264 feet per NM to 7260.

D-ATIS	NORCAL APP CON	RENO TOWER	GND CON	CLNC DEL	CPDLC
135.8 363.0	119.2 279.55 126.3 353.9	118.7 257.8	121.9 348.6	124.9 370.85	

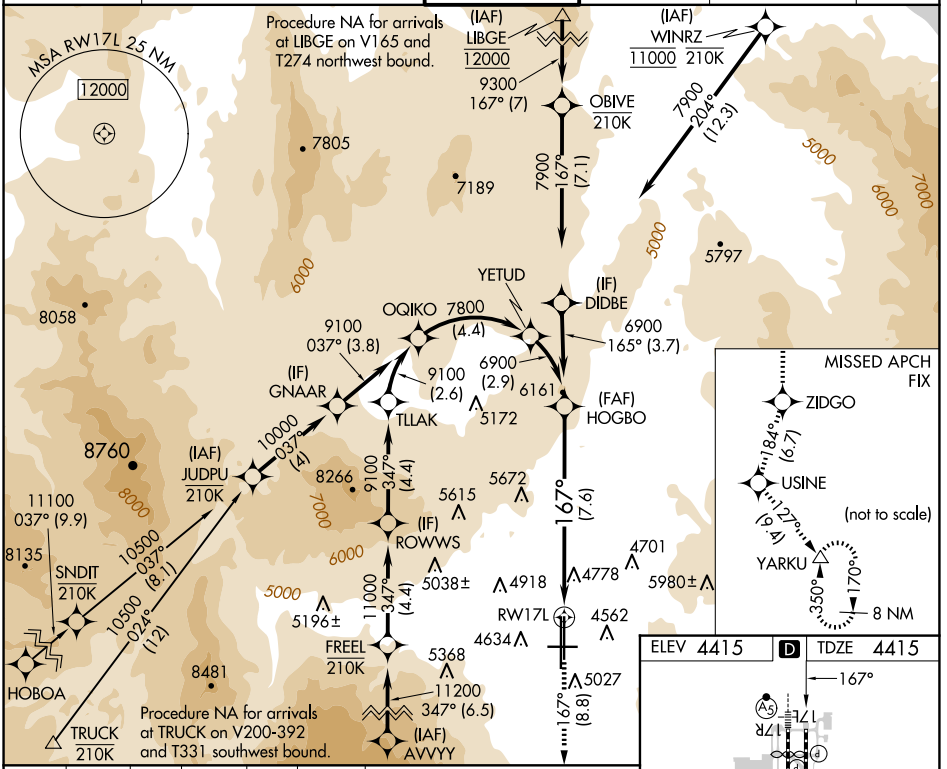

13000	ZIDGO	tr 184°	USINE	tr 127°	YARKU
tr 167°					

See planview for multiple IF locations.

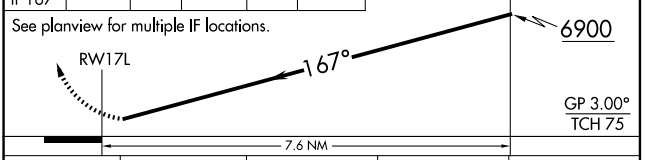

CATEGORY	A	B	C	D
RNP 0.12 DA*	4754-1 339 (400-1)			
RNP 0.17 DA#	5017-1¾ 602 (700-1¾)			
RNP 0.30 DA	5067-1⅞ 652 (700-1⅞)			

AUTHORIZATION REQUIRED

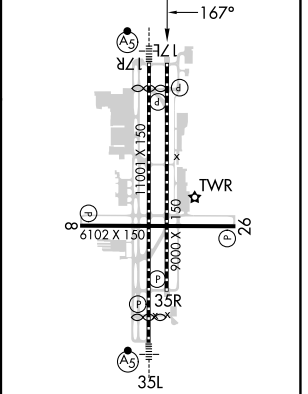

MIRL Rwy 8-26
REIL Rwys 8, 17L, 26, and 35R
HIRL Rwys 17R-35L and 17L-35R

SW-4, 15 MAY 2025 to 12 JUN 2025
SW-4, 15 MAY 2025 to 12 JUN 2025