LOC/DME	APP CRS	Rwy Idg	TDZE	Apt Elev
I-SZK 111.1 Chan 48	072°	6800	1175	1175

LDA Z RWY 6

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)

ADF required. RADAR required for procedure entry.

-13°C For inop ALS, increase S-LDA/GS 6 visibility all Cats to 7/8 SM.

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 5000 direct VIT NDB and hold, continue climb-in-hold to 5000. Missed approach requires minimum climb of 350 feet per NM to 3600.

ATIS	ROANOKE APP CON	ROANOKE TOWER	GND CON	CLNC DEL
132.375	126.9 339.8	118.3 257.8	121.9 257.8	119.7

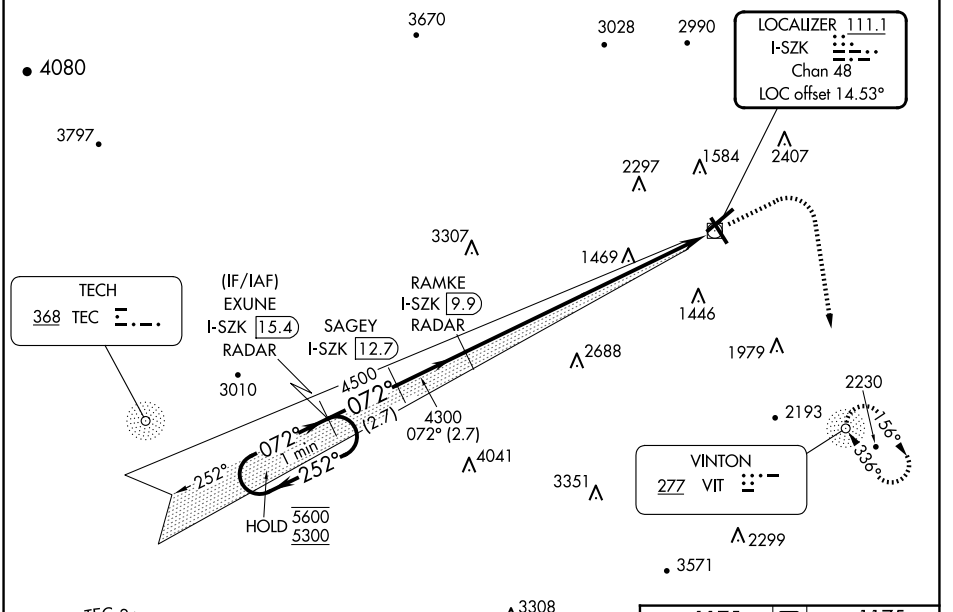

LDA/GLIDE SLOPE

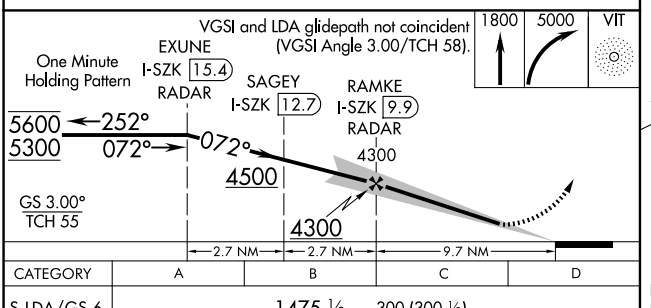

CATEGORY	A	B	C	D
S-LDA/GS 6	1475-½	300 (300-½)		

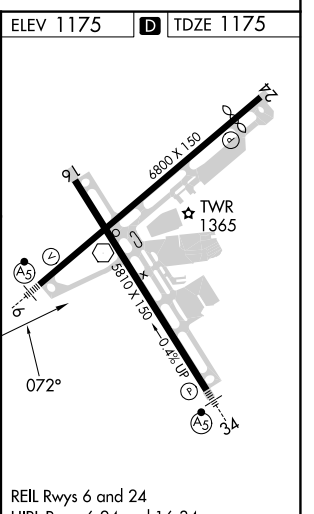

REIL Rwys 6 and 24
HIRL Rwys 6-24 and 16-34

NE-3, 15 MAY 2025 to 12 JUN 2025
NE-3, 15 MAY 2025 to 12 JUN 2025