

# HI-ILS or LOC Z RWY 18L


|                           |                         |  |
|---------------------------|-------------------------|--|
| LOC I-VAD<br><b>109.3</b> | APCH CRS<br><b>183°</b> | Rwy ldg<br>TDZE<br>Arprt Elev<br><b>9300</b><br><b>233</b><br><b>233</b> |
|---------------------------|-------------------------|--|

[USAF]



MOODY AFB (KVAD)

|  |  |            |  |
|--|--|------------|--|
| RADAR or DME required  |  | ALSF-1<br> | MISSED APPROACH: Climb to 3000 on VAD TACAN R-183 to EQUIP and hold. |
| * When ALS inop, increase RVR to 40 and vis to 3/4 mile.<br>** When ALS inop, increase vis to 1 3/8 miles. |  |            |  |

|                        |  |  |                                |                                  |
|------------------------|--|--|--------------------------------|----------------------------------|
| ATIS ★<br><b>273.5</b> | VALDOSTA APP CON<br><b>126.6 285.6</b> | TOWER ★<br><b>128.45</b> (CTAF) <b>257.625</b> | GND CON<br><b>138.95 275.8</b> | CLNC DEL<br><b>120.625 296.7</b> |
|------------------------|--|--|--------------------------------|----------------------------------|

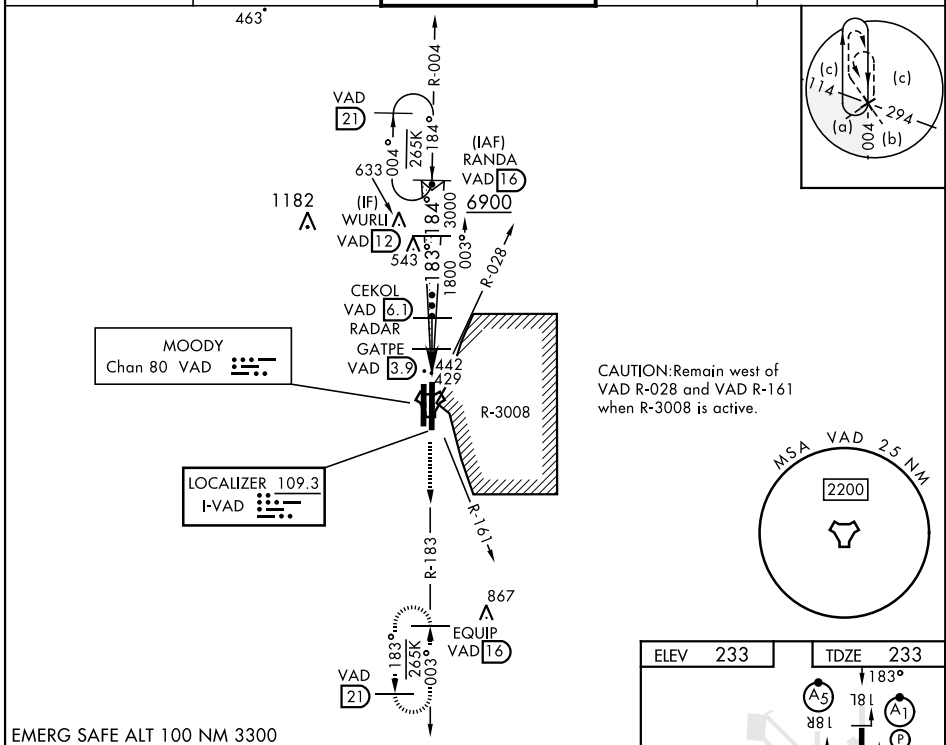

EMERG SAFE ALT 100 NM 3300

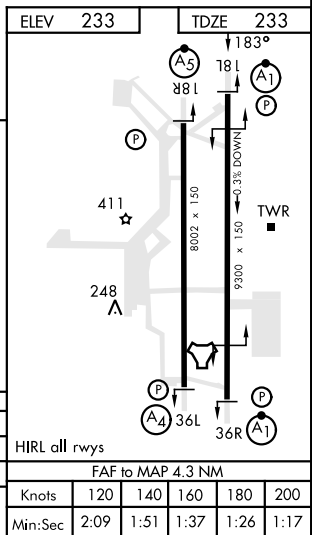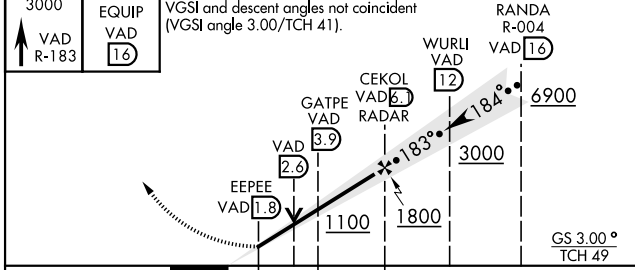

|             |                              |       |             |
|-------------|------------------------------|-------|-------------|
| CATEGORY    | C                            | D     | E           |
| S-ILS 18L*  | 433/24                       | 200   | (200-1/2)   |
| S-LOC 18L** | 680/45                       | 447   | (500-7/8)   |
| CIRCLING    | 760-1 1/2<br>527 (600-1 1/2) | 800-2 | 567 (600-2) |

# HI-ILS or LOC Z RWY 18L

SE-4, 15 MAY 2025 to 12 JUN 2025

SE-4, 15 MAY 2025 to 12 JUN 2025