

|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Idg  | 9817 |
| 272°    | TDZE     | 469  |
|         | Apt Elev | 491  |

RNAV (GPS) RWY 27  
NEW YORK STEWART INTL (SWF)

RNP APCH

**T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below  
**A** -15°C or above 54°C.


**MISSED APPROACH:** Climb to 3000 direct EKETE and hold.

ATIS  
124.575

NEW YORK APP CON  
132.75 363.1

STEWART TOWER  
121.0 254.4

GND CON  
121 9

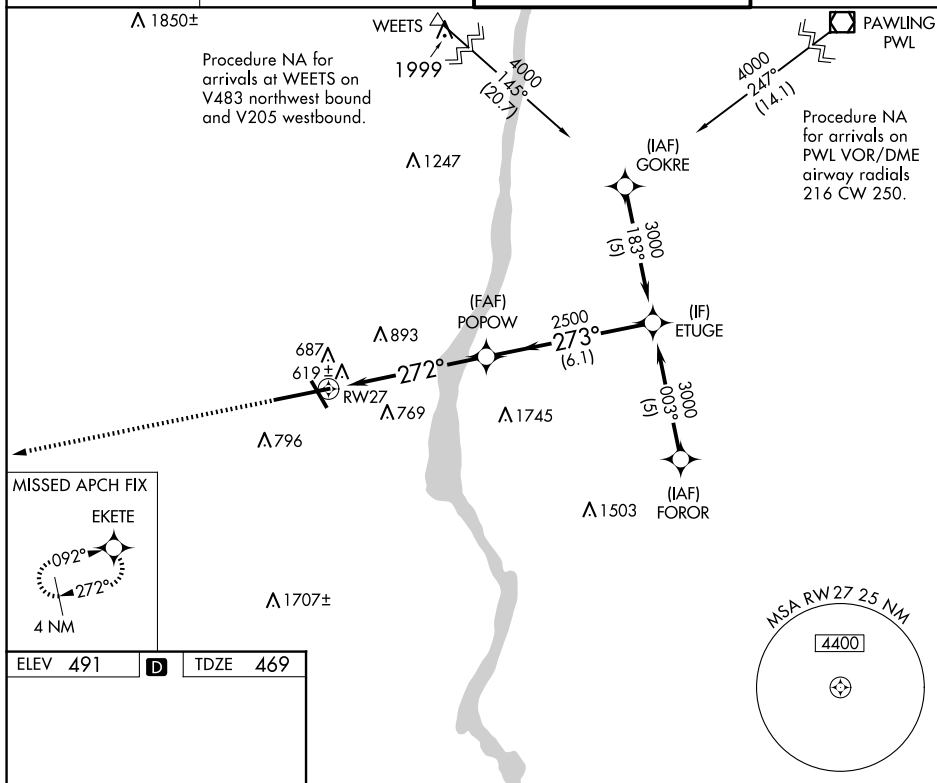

|          |                                                                                   |          |
|----------|-----------------------------------------------------------------------------------|----------|
| ELEV 491 |  | TDZE 469 |
|----------|-----------------------------------------------------------------------------------|----------|

TDZ/CL Rwy 9  
HIRL Rwys 9-27 and 16-34  
REIL Rwys 16, 27 and 34

3000  
↑  
EKETE

\* LNAV only.

RW27

1.5 NM

272°

2500

POPOW

273°

2500

ETUGE

3000

Procedure Turn NA

GP 3.00%  
TCH 55

| CATEGORY          | A                  | B           | C                       | D                       |
|-------------------|--------------------|-------------|-------------------------|-------------------------|
| LNAV/DA<br>VNAV   | 1048-2 579 (600-2) |             |                         |                         |
| LNAV MDA          | 1000-1             | 531 (600-1) | 1000-1½<br>531 (600-1½) | 1000-1¾<br>531 (600-1¾) |
| <b>C</b> CIRCLING | 1200-1             | 709 (800-1) | 1200-2<br>709 (800-2)   | 1200-2¼<br>709 (800-2¼) |