FAIRFIELD, CALIFORNIA

ILS RWY 21L (CAT II)

TRAVIS AFB (KSUU)

LOC I-SUU	APCH CRS	Rwy Idg 10,995
110.1	215°	TDZE 58
		Arpt Elev 63

[USAF]

RNAV1- GPS or RADAR required.

RADAR required for CAT E aircraft for full procedure off of SEATO.

ALSF-2

MISSED APPROACH: Climb to 2200 then climbing right turn to 4500 direct SEATO and hold, continue climb in hold to 4500.

ATIS	APP CON	TOWER	GND CON	CLNC DEL
135.55 292.125	119.9 322.325 (S) 126.6 281.45 (N)	120.75 254.4	121.8 289.4	127.55 335.8

CATEGORY II ILS SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

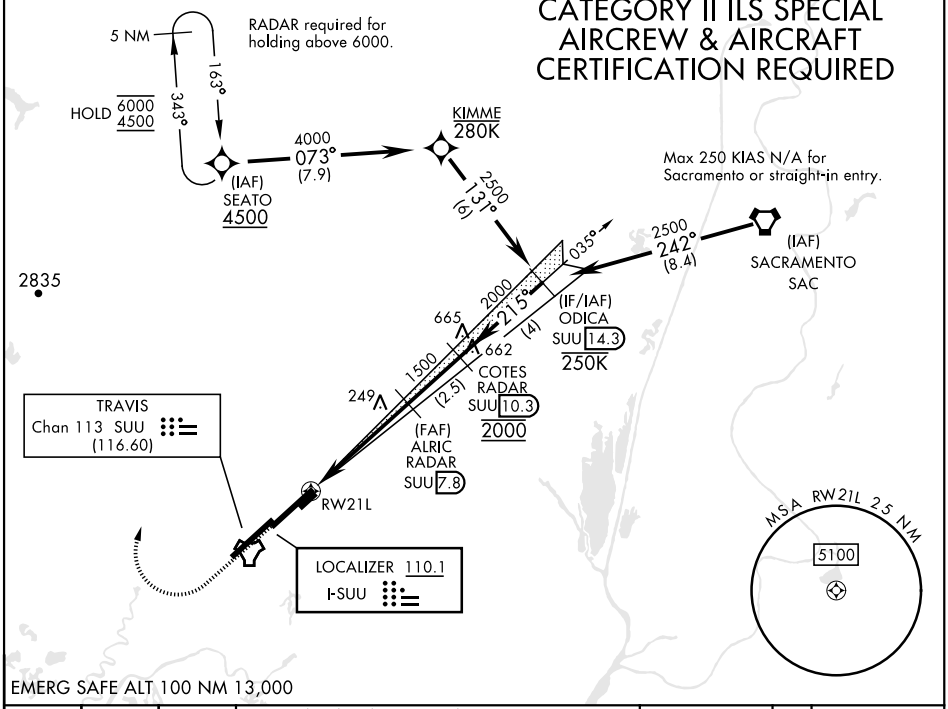

2200 | 4500 | SEATO

VGSI and glidepath not coincident (VGSI Angle 2.80/TCH 75).

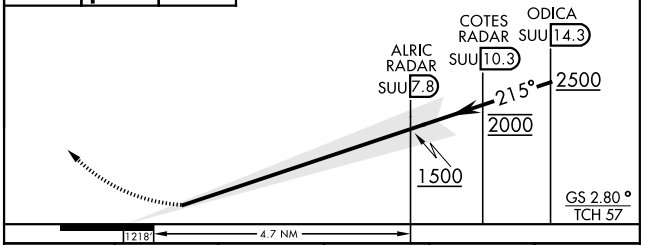

CATEGORY	A	B	C	D	E
S-ILS 21L	RA 83/12		100	DA 158	

ELEV 63 | TDZE 58



FAIRFIELD, CALIFORNIA

38°16'N-121°55'W

TRAVIS AFB (KSUU)

Orig 19MAY22

ILS RWY 21L (CAT II)

SW-2, 15 MAY 2025 to 12 JUN 2025