

DOVER, DELAWARE

# ILS or LOC or RNAV (GPS) RWY 1

DOVER AFB (KDOV)

WAAS CH <b>52207</b> <b>W01A</b>	APCH CRS <b>015°</b>	Rwy ldg <b>9602</b> TDZE <b>25</b> Arpt Elev <b>29</b>
--	-------------------------	--

[USAF]

RNP APCH. RNAV1-GPS or RADAR required for ILS, LOC.


- ▼ \* When TDZL/CL inop, increase RVR to 24, RVR of 18 authorized with use of FD or AP or HUD to DA. When ALS inop, increase RVR to 40, vis to ¼ mile.
- \*\* When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1⅓ miles.
- \*\*\* When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1⅓ miles.




MISSED APPROACH: Climb to 2000 direct NOVTE and hold.

ALTERNATE MISSED APPROACH: Fly runway heading, climb and maintain 2000, expect radar vectors from ATC.


ATIS <b>127.825 273.5</b>	APP CON <b>132.425 257.875</b>	TOWER <b>126.35 279.625</b>	GND CON <b>118.875 225.4</b>	CLNC DEL <b>125.55 289.4</b>
------------------------------	-----------------------------------	--------------------------------	---------------------------------	---------------------------------

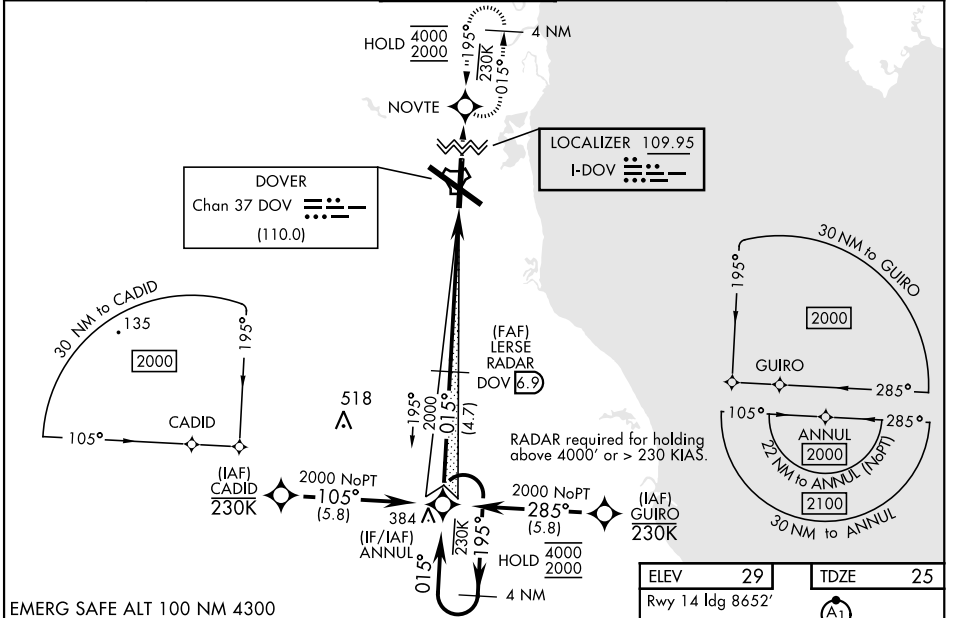

EMERG SAFE ALT 100 NM 4300

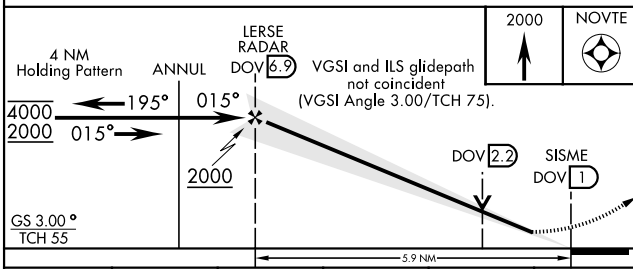

ELEV <b>29</b>	TDZE <b>25</b>
Rwy 14 ldg 8652'	



CATEGORY	A	B	C	D	E
S-ILS 1*	225/18		200	(200-½)	
LPV DA*	225/18		200	(200-½) NA	
S-LOC 1**	500/24	475 (500-½)	500/50	475	(500-1)
LNAV MDA***	500/24	475 (500-½)	500/50	475 (500-1)	NA
CIRCLING	540-1	511 (600-1)	620-1½	620-2	1080-3
			591 (600-1½)	591 (600-2)	1051 (1100-3)

HIRL all rwys REIL Rwy 32 TDZL/CL Rwy 1					
FAF to MAP 5.9 NM					
Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

DOVER, DELAWARE  
Amdt 2 26DEC24

39°08'N-75°28'W

DOVER AFB (KDOV)

# ILS or LOC or RNAV (GPS) RWY 1

NE-3, 15 MAY 2025 to 12 JUN 2025

NE-3, 15 MAY 2025 to 12 JUN 2025