
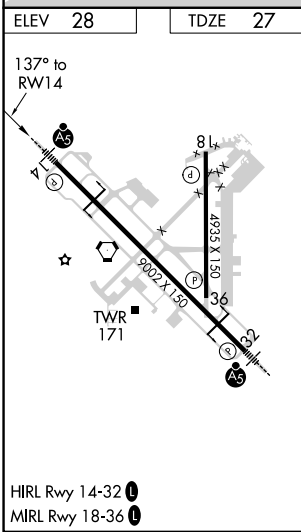


WAAS CH <b>97301</b> W14A	APP CRS <b>137°</b>	Rwy Idg <b>9002</b> TDZE <b>27</b> Apt Elev <b>28</b>
---------------------------------	------------------------	---

# RNAV (GPS) RWY 14

GULFPORT-BILOXI INTL (GPT)

RNP APCH.		MALSRL	MISSED APPROACH: Climb to 2800 direct IVOLE and hold.	
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500.                  ▲ ASR **RVR 1800 authorized with use of FD or AP or HUD to DA.</p>				
ATIS <b>119.45</b>	GULFPORT APP CON * <b>127.5 254.25</b>	GULFPORT TOWER * <b>123.7 (CTAF) 339.8</b>	GND CON <b>120.4 348.6</b>	UNICOM <b>122.95</b>

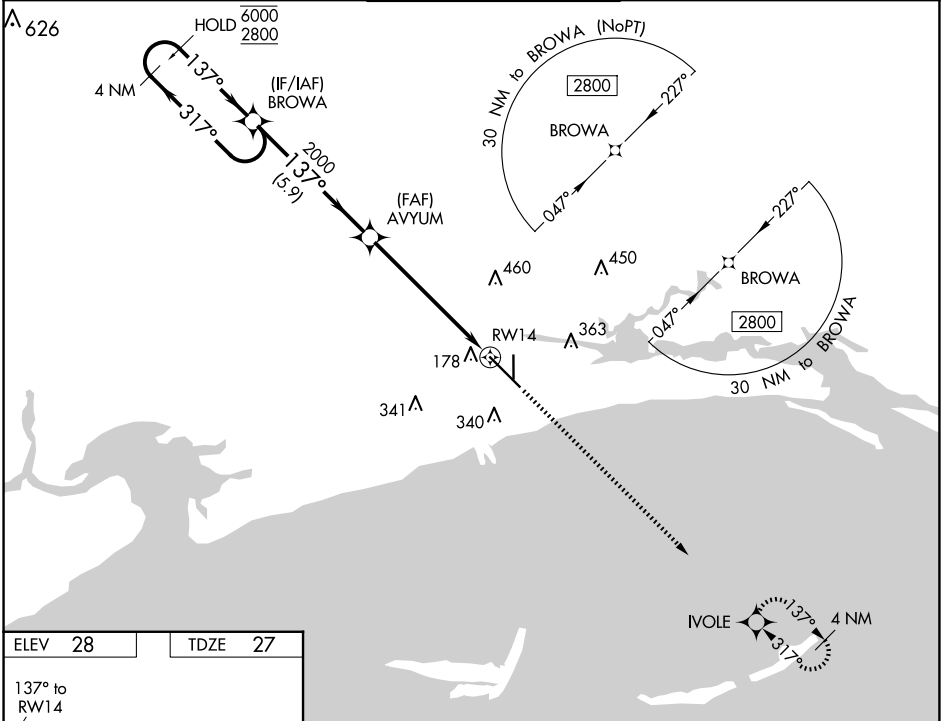

ELEV 28		TDZE 27	
<p>4 NM Holding Pattern BROWA</p> <p>6000 ← 317°</p> <p>2800 → 137°</p>		<p>VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).</p> <p>2800 IVOLE</p> <p>*LNAV only.</p>	
<p>GP 3.00° TCH 50</p> <p>2000</p> <p>5.9 NM 4.6 NM 1.5 NM</p>		<p>AVYUM</p> <p>2000</p> <p>*1.5 NM to RWY 14</p> <p>RWY 14</p>	
CATEGORY	A	B	C
LPV DA**	227/24 200 (200-½)		
LNAV/VNAV DA	404/35 377 (400-⅝)		
LNAV MDA	580/24	553 (600-½)	580/60 553 (600-1¼)
CIRCLING	580-1 552 (600-1)	640-1 612 (700-1)	820-2¼ 792 (800-2¼) 820-2½ 792 (800-2½)

SC-4, 15 MAY 2025 to 12 JUN 2025

SC-4, 15 MAY 2025 to 12 JUN 2025