

APP CRS
079°

Rwy Idg 12312
TDZE 13
Apt Elev 13


RNAV (RNP) Z RWY 8L
DANIEL K INOUE INTL (HNL) (PHNL)

RNP AR APCH - GPS.
For uncompensated Baro-VNAV systems, procedure NA below 17°C or above 54°C. For inop ALS, increase RNP 0.15 DA all Cts visibility to ½ SM.


MALSR

MISSED APPROACH: Climb to 420 then climbing right turn to 3000 direct ALANA and hold.

D-ATIS 127.9 251.15	HCF APPROACH 118.3 269.0	HONOLULU TOWER 118.1 257.8 123.9 273.575 (Rwy 8R/26L)	GND CON 121.9 348.6	CLNC DEL 121.4 281.4
------------------------	-----------------------------	---	------------------------	-------------------------

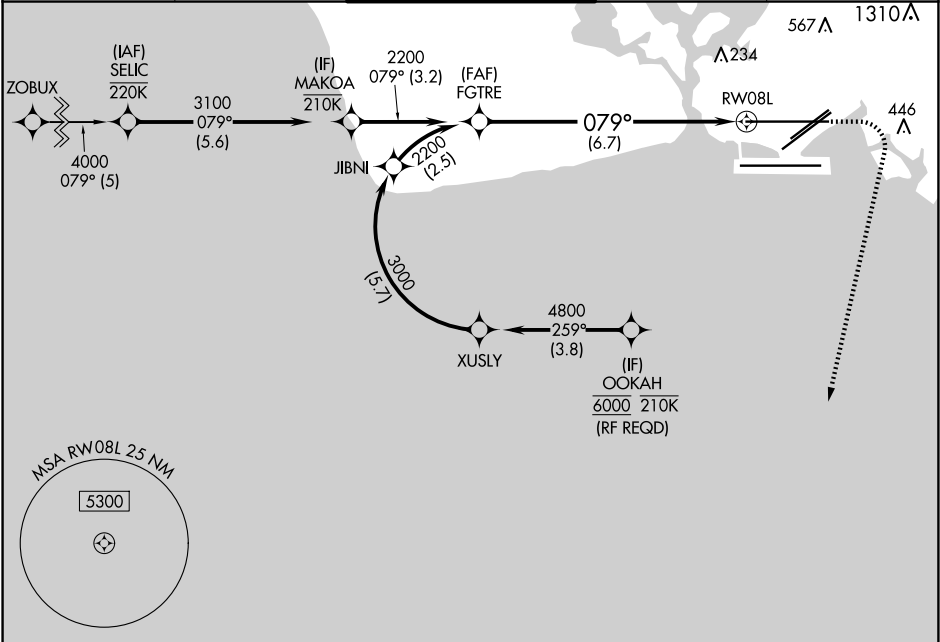

ELEV 13	D	TDZE 13
---------	---	---------

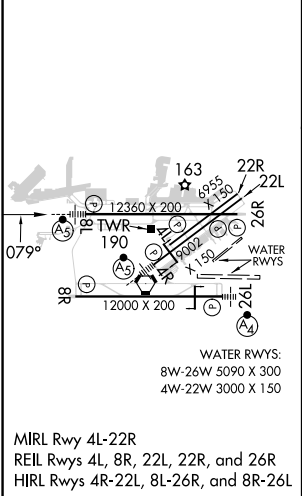

ALANA 420 3000 ALANA

GP 3.00° TCH 56

MAKOA 3100 079° 2200

FGTR 2200

RW08L

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.15 DA		285-½ 272 (300-½)		
RNP 0.30 DA		347-½ 334 (400-½)		

AUTHORIZATION REQUIRED