


VORTAC ELW 108.6 Chan 23	APP CRS 039°	Rwy Idg 6002 TDZE 759 Apt Elev 782
---------------------------------------	------------------------	---

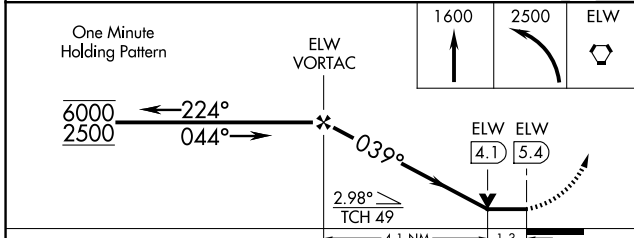
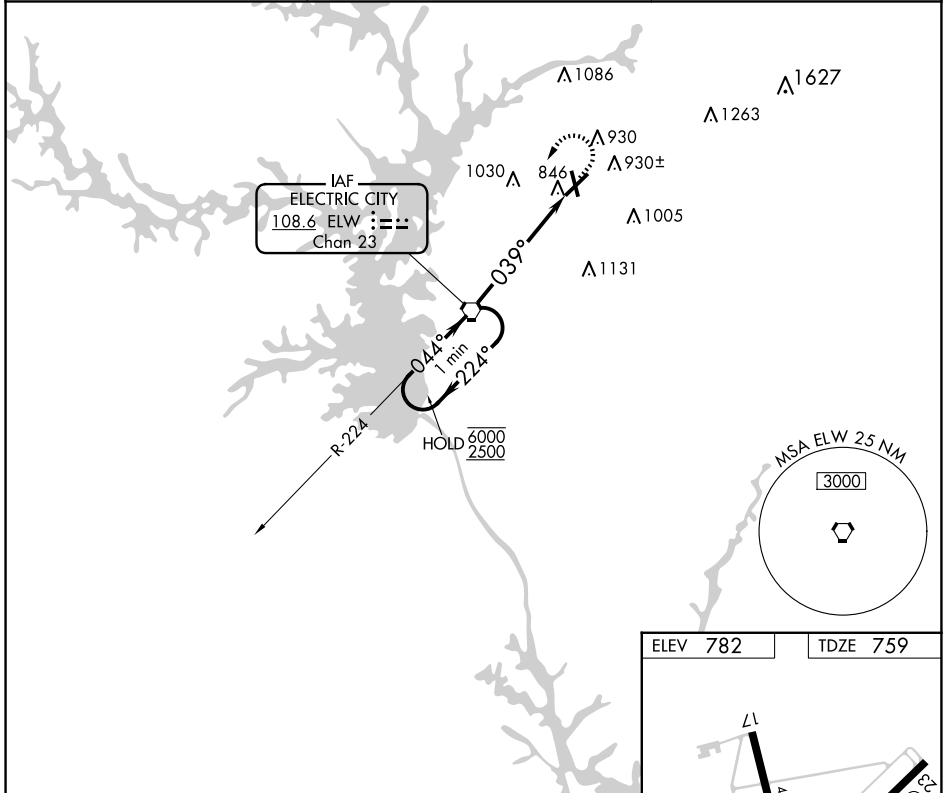
VOR RWY 5

ANDERSON RGNL (A.ND)

▼ Rwy 17, 35 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use CEU altimeter setting and increase all MDAs 60 feet and S-5 visibility Cat C/D 1/8 SM, and Circling visibility Cat C/D 1/4 SM. VDP NA when using CEU altimeter setting. Circling Rwy 17, 35 NA at night.

MALSRL

 MISSED APPROACH: Climb to 1600 then climbing left turn to 2500 direct ELW VORTAC and hold.

ASOS 120.675	GREENER APP CON ★ 118.8 270.275	CTAF 123.6 0
------------------------	---	------------------------



ELEV 782	TDZE 759
----------	----------

HIRL Rwy 5-23 0

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Seq	5:24	3:36	2:42	2:10	1:48

SE-2, 15 MAY 2025 to 12 JUN 2025

SE-2, 15 MAY 2025 to 12 JUN 2025