

|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>86519</b><br><b>W05A</b> | APP CRS<br><b>053°</b> | Rwy Idg <b>6819</b><br>TDZE <b>1297</b><br>Apt Elev <b>1297</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|


# RNAV (GPS) RWY 5

MANSFIELD LAHM RGNL (MFD)

RNP APCH  
 ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F).


MISSED APPROACH: Climb to 3000 direct NANNI and hold.

|                      |                                             |                                                  |                                 |                         |
|----------------------|---------------------------------------------|--------------------------------------------------|---------------------------------|-------------------------|
| ATIS<br><b>125.3</b> | CLEVELAND APP CON *<br><b>128.35 360.65</b> | MANSFIELD TOWER *<br><b>119.8 (CTAF) 291.775</b> | GND CON<br><b>121.8 291.775</b> | UNICOM<br><b>122.95</b> |
|----------------------|---------------------------------------------|--------------------------------------------------|---------------------------------|-------------------------|

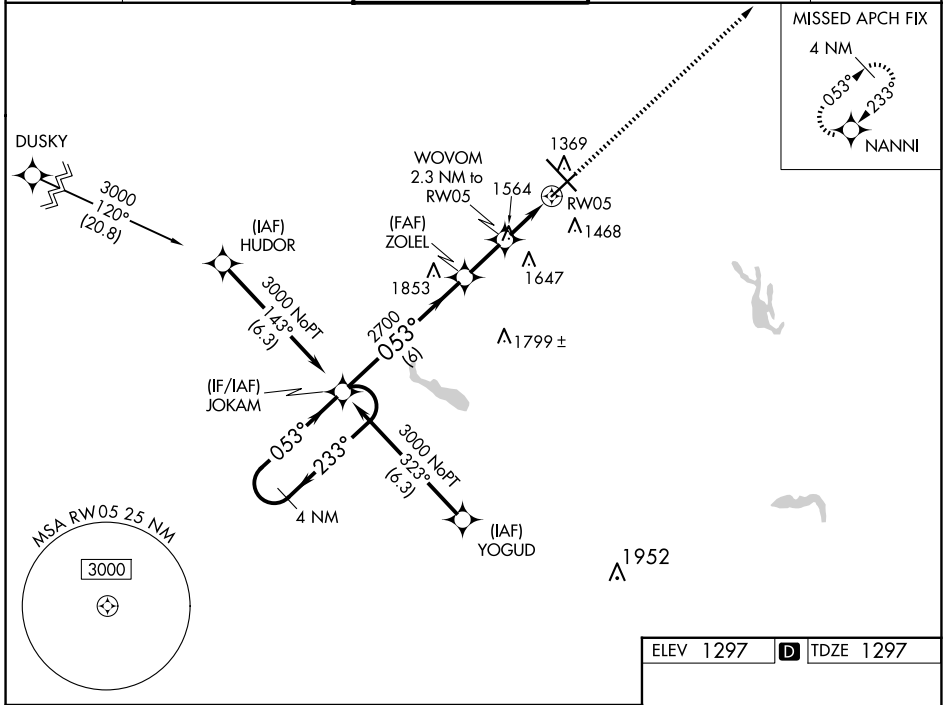

EC-2, 15 MAY 2025 to 12 JUN 2025

EC-2, 15 MAY 2025 to 12 JUN 2025

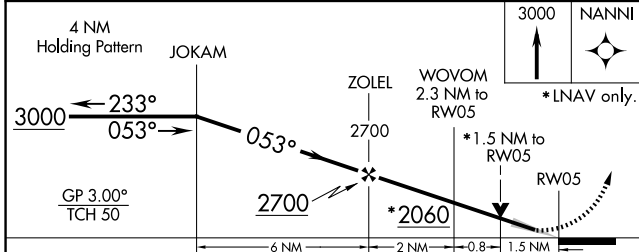

| CATEGORY          | A                  | B        | C                          | D                          |
|-------------------|--------------------|----------|----------------------------|----------------------------|
| LPV DA            |                    | 1547-7/8 | 250 (300-7/8)              |                            |
| LNAV/VNAV DA      |                    | 1590-1   | 293 (300-1)                |                            |
| LNAV MDA          | 1820-1 523 (600-1) |          | 1820-1 1/2 523 (600-1 1/2) |                            |
| <b>C</b> CIRCLING | 1820-1 523 (600-1) |          | 2000-2 703 (800-2)         | 2000-2 1/4 703 (800-2 1/4) |

