


ILS Z or LOC/DME Z RWY 24R

LOC/DME I-NKX 111.15 Chan 48(Y)	APCH CRS 243°	Rwy Ldg 8001	24L 24R 12,000
		TDZE 477	475
		Arpt Elev 477	477


[USN]

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)


DME and RADAR required			MISSED APPROACH: Climb to 1500, then climbing right turn to 3000 via heading 340°. Expect radar vectors.			
* When ALS inop, increase vis to 3/4 mile. ** When ALS inop, increase CAT AB vis to 1 mile, CAT CDE vis to 1 3/8 miles. *** CAT E circling not authorized S of Rwy 6R-24L.						
ATIS ★ 133.475 352.0	SOCAL APP CON 132.2 269.1	FOSS TOWER ★ 135.2 298.925	GND CON 128.625 307.325	CLNC DEL 125.975 254.325	LA CENTER 291.7	ASR/ PAR

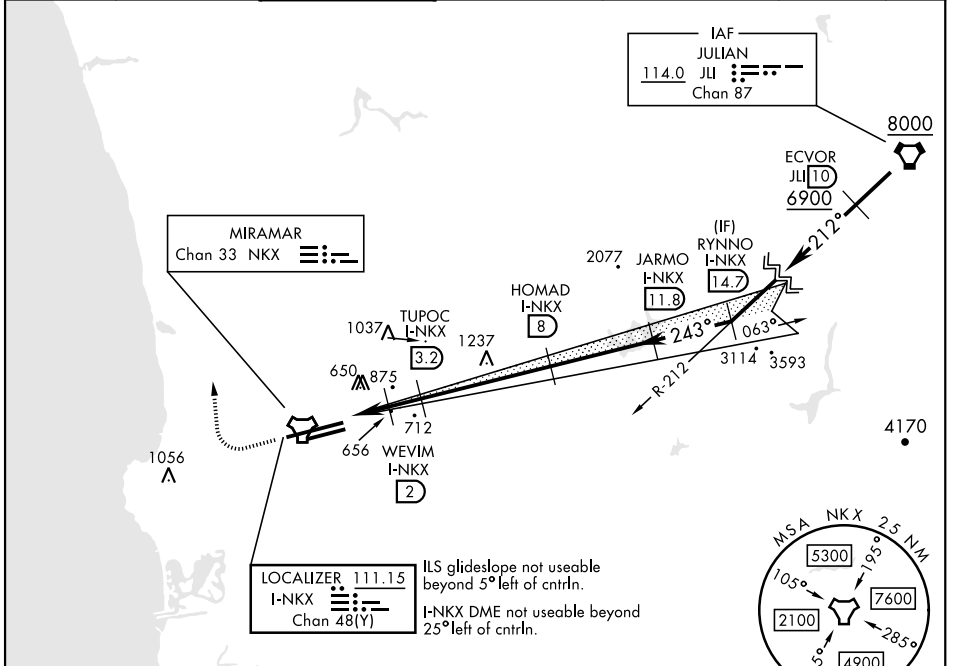

EMERG SAFE ALT 100 NM 13,600

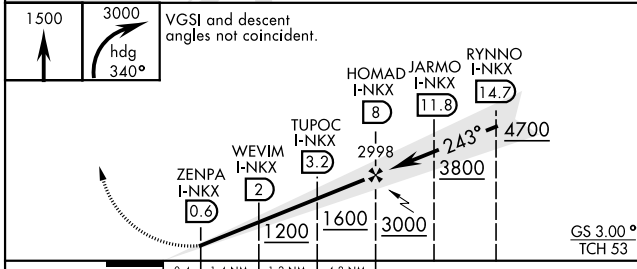

ELEV	477	TDZE 24L	477
		TDZE 24R	475



CATEGORY	A	B	C	D	E
S-ILS 24R*	675 - 1/2		200	(200-1/2)	
S-LOC/DME 24R**	920-1/2	445 (500-1/2)	920-7/8	445 (500-7/8)	
SIDESTEP 24L	920-1	443 (500-1)	920-1 1/2 443 (500-1 1/2)	920-2 443 (500-2)	
CIRCLING***	940-1 463 (500-1)	960-1 483 (500-1)	960-1 1/2 483 (500-1 1/2)	1180-2 1/4 703 (800-2 1/4)	1360-3 883 (900-3)

HIRL Rwy 6L-24R	12,000 x 200
HIRL Rwy 6R-24L	800 x 200
	1090 x 100

ILS Z or LOC/DME Z RWY 24R

SW-3, 15 MAY 2025 to 12 JUN 2025

SW-3, 15 MAY 2025 to 12 JUN 2025