RNAV (RNP) Z RWY 36

CORPUS CHRISTI INTL (CRP)

APP CRS	Rwy Idg	6080
355°	TDZE	40
	Apt Elev	44

For uncompensated Baro-VNAV systems, procedure NA below -1°C (-31°F) or above 54°C (130°F). GPS required. For inop MALSR, increase RNP 0.11 visibility all Cats to RVR 4000. For inop MALSR, increase RNP 0.30 visibility all Cats to RVR 5900.

MALSR

MISSED APPROACH: Climb to 2000 on track 355° to EXIKE and on track 294° to ATHIS and hold.

ATIS	CORPUS APP CON	CORPUS TOWER	GND CON	CLNC DEL
126.8	120.9 348.725	119.4 257.8	121.9 269.15	118.55

SKIDS (RF REQD)
4000 164° (10.3)
(IAF) EJUXO
294° (20.5)
4000 164° (10.7)
FEDEB
4000 134° (6)
(IF) FIKLI
MSA RW36 25 NM
2200
1050
1048
2400 148° (7.3)
ENMOJ Max 180 KIAS
1051
1900 (3.3)
ZIBKO
1300 355° (8.1)
HADON 1600 (RADAR REQD)
(FAF) ZADUR 1300 (2.6)
355° (3.8)
EXIKE
355° (8.9)
470
423
358
MISSED APCH FIX
110° ATHIS
290° 4 NM
Procedure NA for arrivals on CRP VORTAC airway radials 030 CW 184.
AUSTS (RNP 0.70) (RF REQD)
4000 192° (10.4)
(IAF) CORPUS CHRISTI CRP (RNP 0.70) (RF REQD)
4000 145° (3.1)
WADPI
4000 176° (5)
562±
(IF) VOWKO
508
(IF) GLASN
3100 204° (3.4)
(IAF) COPAN (RNP 0.70) (RF REQD)
4000 205° (19.5)
RW36
250
2700 174° (4.4)
Cabaniss Field NOLF
RUVVU
2700 Max 180 KIAS (1.5)
1300 (2.6)
YADUS
2000 (4.4)
YUCUN Max 180 KIAS
(IF) HADON 1600 (RADAR REQD)

ELEV 44 | D | TDZE 40

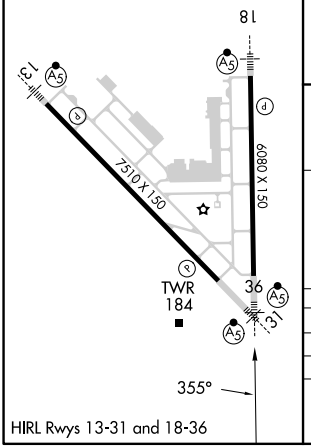

HIRL Rwys 13-31 and 18-36

2000 tr 355°	EXIKE	tr 294°	ATHIS

See Planview for multiple IF locations.

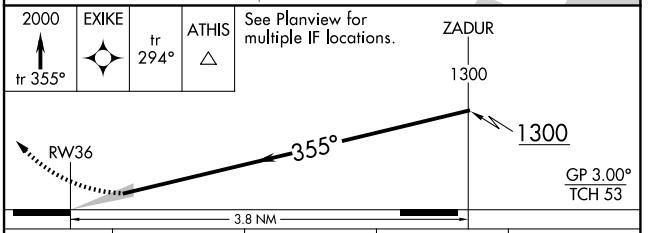

CATEGORY	A	B	C	D
RNP 0.11 DA		290/24	250 (300-½)	
RNP 0.30 DA		400/34	360 (400-⅝)	

AUTHORIZATION REQUIRED

SC-3, 15 MAY 2025 to 12 JUN 2025

SC-3, 15 MAY 2025 to 12 JUN 2025