
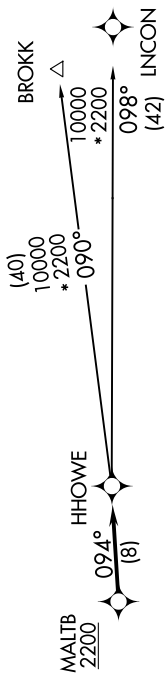


EC-1, 15 MAY 2025 to 12 JUN 2025

RNAV-1 DME/DME/IRU or GPS.  
RADAR required.

TOP ALTITUDE:  
ASSIGNED BY ATC

DETROIT DEP CON  
132.35 284.0  
ATIS  
125.025  
CINC DEL  
118.25  
GND CON  
121.9  
PONTIAC TOWER \*  
120.5 (CTAF)



NOTE: Turbojet departures at/above 10000, maintain 280K until advised by ATC.  
NOTE: BROKK TRANSITION: For use by flights filed at or below FL270, or as assigned by ATC.

TAKEOFF MINIMUMS:  
Rwy 9L/R, 27L/R: Standard.  
Rwy 18, 36: NA-Environmental.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 9L/R: Climb on heading 095° or as assigned by ATC, thence....  
TAKEOFF RUNWAYS 27L/R: Climb on heading 275° or as assigned by ATC, thence....  
...for RADAR vectors to cross MALTB at or above 2200, then on track 094° to HHOWE, then on (transition).  
Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.  
BROKK TRANSITION (HHOWE4.BROKK):  
LINCON TRANSITION (HHOWE4.LINCON):

EC-1, 15 MAY 2025 to 12 JUN 2025