


WAAS CH 99414 W08A	APP CRS 079°	Rwy Idg TDZE 463 Apt Elev 463	5000
--	------------------------	---	-------------

RNAV (GPS) RWY 8L

SPRIT OF ST LOUIS (SUS)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct DBLEE and right turn on track 171° to BNANA and right turn on track 272° to DERDF and hold.
<p>⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Helicopter visibility reduction below 3/4 SM NA. VDP and Baro-VNAV NA when using St Louis Lambert Intl altimeter setting. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase LPV DA to 912, LNAV/VNAV DA to 1132 and all MDA 60 feet, increase LPV all Cats visibility to 1 1/2 miles.</p>	

ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPRIT TOWER* 124.75 (CTAF) 0 257.2	GND CON 121.7	CLNC DEL 133.1	ST. LOUIS CLNC DEL 121.7 (when tower closed)	UNICOM 122.95
----------------------	---	---	-------------------------	--------------------------	---	-------------------------

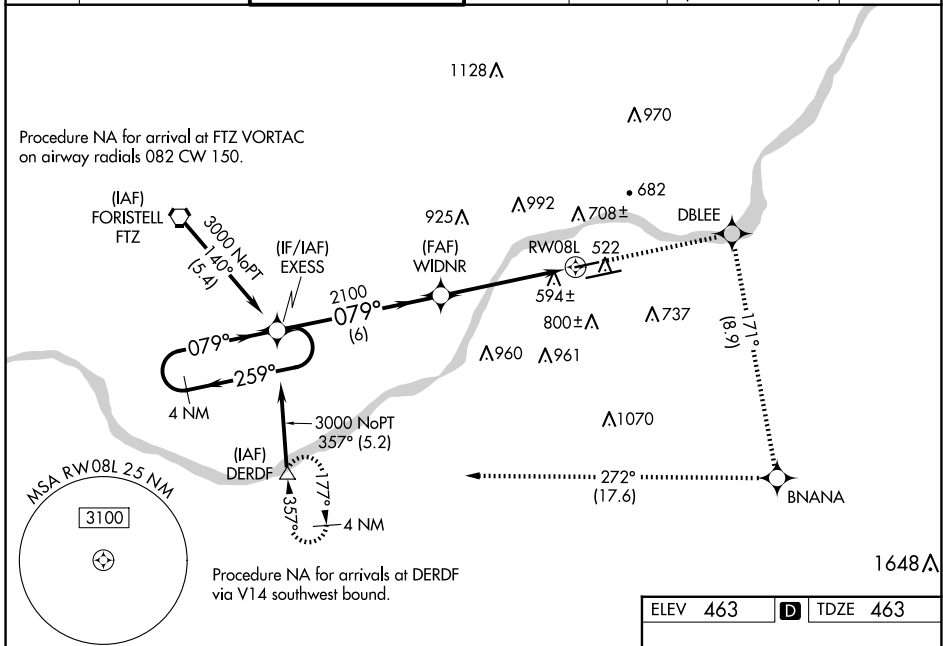

NC-3, 15 MAY 2025 to 12 JUN 2025

NC-3, 15 MAY 2025 to 12 JUN 2025

ELEV 463 D TDZE 463									
4 NM Holding Pattern	<table border="1"> <tr> <td>3000</td> <td>DBLEE</td> <td>BNANA</td> <td>DERDF</td> </tr> <tr> <td>↑</td> <td>✦</td> <td>tr 171°</td> <td>tr 272°</td> </tr> </table>	3000	DBLEE	BNANA	DERDF	↑	✦	tr 171°	tr 272°
3000	DBLEE	BNANA	DERDF						
↑	✦	tr 171°	tr 272°						
<p>GP 3.00° TCH 41</p> <p>3000 ← 259° 079° →</p> <p>2100</p> <p>6 NM 3.3 NM 1.7 NM</p> <p>*LNAV only</p>	<p>EXCESS</p> <p>WIDNR</p> <p>RW08L</p> <p>*1.7 NM to RW08L</p>								
CATEGORY	A B C D								
LPV DA	855-1 3/8 392 (400-1 3/8)	NA	NA						
LNAV/VNAV DA	1075-2 1/2 612 (700-2 1/2)	NA	NA						
LNAV MDA	1040-1 577 (600-1)	NA	NA						
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	NA						

