LOC RWY 17R

DAVID WAYNE HOOKS MEML (DWH)

LOC/DME I-HEW	APP CRS	Rwy ldg	6002
110.5	168°	TDZE	152
Chan 42		Apt Elev	152

RADAR required for procedure entry.

When local altimeter setting not received, use George Bush Intcntl/Houston altimeter setting and increase all MDA 40 feet; increase S-LOC 17R Cats C/D visibility ⅛ mile. Circling NA to Rwys 17W and 35W. Rwy 17R helicopter visibility reduction below ¾ SM NA. Circling Rwy 35R NA at night.

NA

MISSED APPROACH: Climb to 1200 then climbing right turn to 2000 on heading 325° and IAH VORTAC R-293 to TNV VOR/DME and hold.

ATIS	HOUSTON APP CON	HOOKS TOWER★	GND CON	CLNC DEL	UNICOM
128.375	119.7 281.4	127.4 354.1 EAST 118.4 (CTAF) L 354.1 WEST	121.8 239.0	119.45	122.95

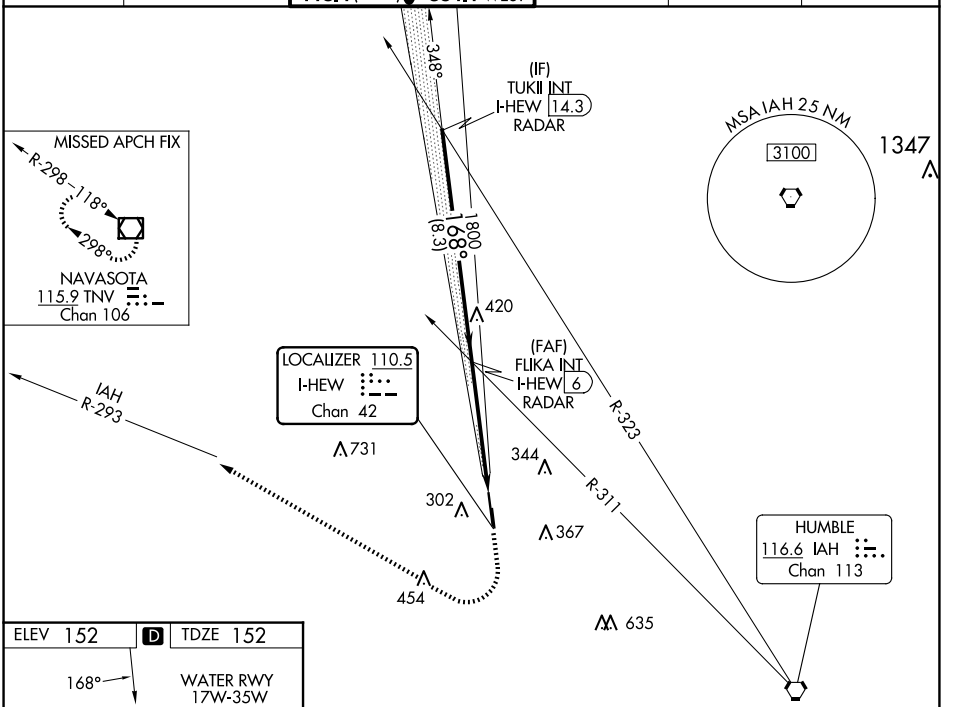

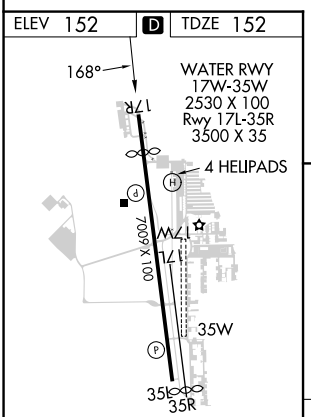

HIRL Rwy 17R-35L L
REIL Rwys 17R and 35L L

FAF to MAP 4.9NM					
Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

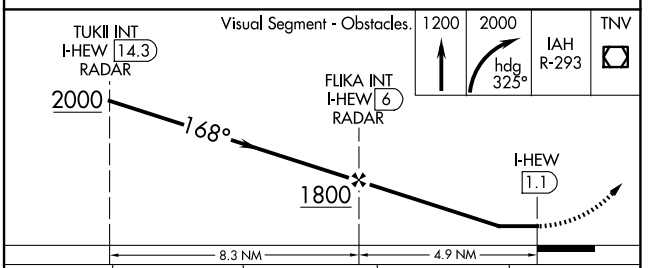

CATEGORY	A	B	C	D
S-LOC 17R	640-1 488 (500-1)		640-1⅜ 488 (500-1⅜)	
C CIRCLING	640-1 488 (500-1)	660-1 508 (600-1)	680-1½ 528 (600-1½)	780-2 628 (700-2)

SC-5, 15 MAY 2025 to 12 JUN 2025
SC-5, 15 MAY 2025 to 12 JUN 2025