

TOP ALTITUDE:
16000

RNAV 1 - DME/DME/IRU or GPS required.

RADAR required.

RADAR required for non - GPS equipped aircraft.

TAKEOFF MINIMUMS

Rwys 8L/R, 9, 15L/R: Standard with
minimum climb of 500'/NM to 1500.

HOUSTON DEP CON 126.675 339.8

D-ATIS 124.05

CLNC DEL 128.1

CPDLC

GND CON

118.575 (Rwys 8L/R, 26L/R, 9/27)

121.7 (Rwys 15L/R, 33L/R)


HOUSTON TOWER

120.725 290.2 (Rwys 8L/26R)

125.35 290.2 (Rwys 8R/26L)

127.3 288.25 (Rwys 15L/R, 33L/R)

135.15 290.2 (Rwys 9/27)

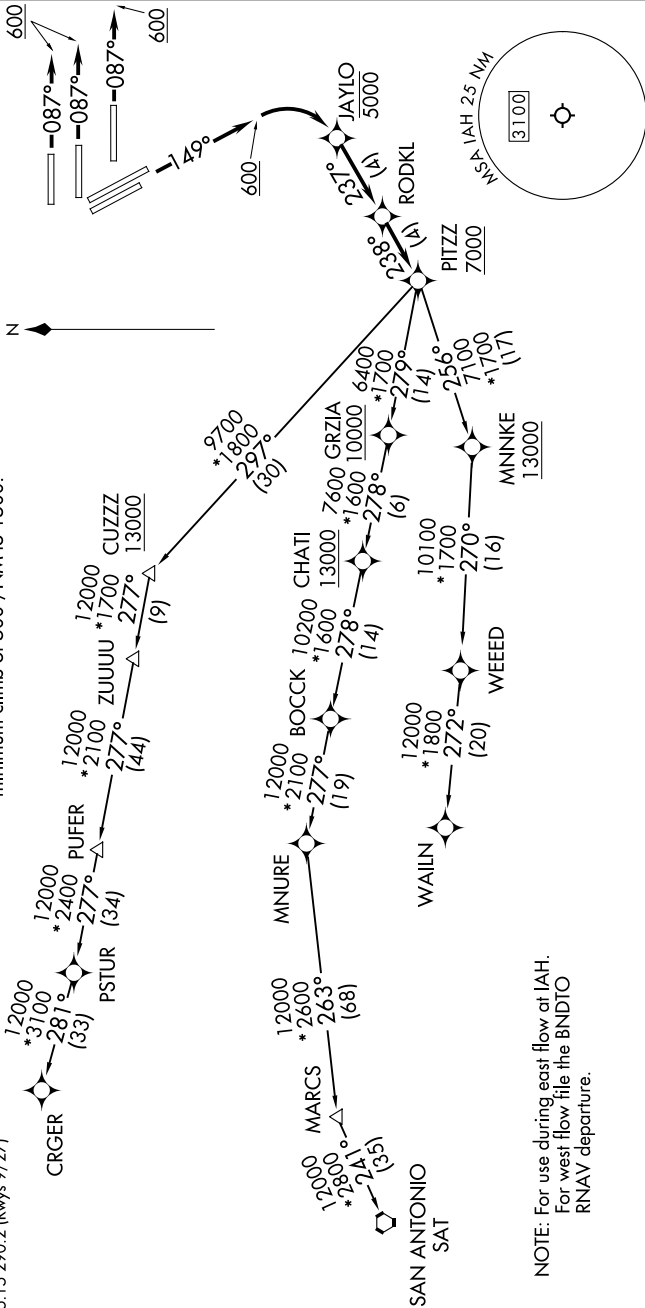

NOTE: For use during east flow at IAH.
For west flow file the BNDTO
RNAV departure.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.