

BOBZY FIVE DEPARTURE (RNAV)

SALISBURY, NORTH CAROLINA

SE-2, 15 MAY 2025 to 12 JUN 2025

CHARLOTTE DEP CON
128.325 307.8
AWOS-3
118.175
CLNC DEL
127.35
UNICOM
122.725


RNAV 1-DME/DME/IRU or GPS.
RADAR required.

TAKEOFF MINIMUMS

Rwy 2: Standard.

Rwy 20: 400-2³/₄ or standard with minimum climb of 205' per NM to 1300, or alternatively, with standard takeoff minimums and a normal 200' per NM climb gradient; takeoff must occur no later than 1200' prior to DER.

TOP ALTITUDE:
3000

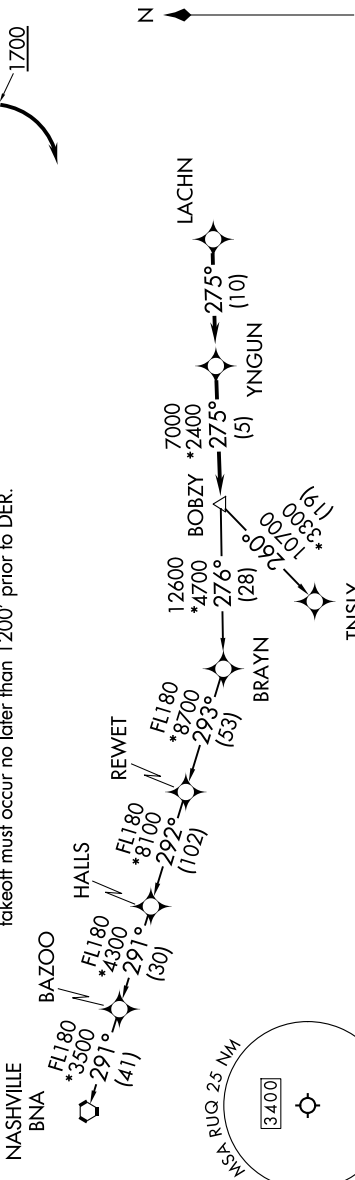

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 2: Climb on heading assigned by ATC, thence. . . .
TAKEOFF RUNWAY 20: Climb on heading 20° to 1700 before turning right, then on heading assigned by ATC, thence. . . .

. . . on RADAR vectors to LACHN, then on depicted route to BOBZY, then on assigned transition. Maintain 3000, expect clearance to filed altitude within 10 minutes after departure.

NASHVILLE TRANSITION (BOBZY5.BNA)
TNSLY TRANSITION (BOBZY5.TNSLY)

- NOTE: For turbo jets only.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.
- NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.
- NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.

NOTE: Chart not to scale.

BOBZY FIVE DEPARTURE (RNAV)

SE-2, 15 MAY 2025 to 12 JUN 2025