

WAAS CH 99424 W23A	APP CRS 230°	Rwy Idg TDZE Apt Elev	5001 847 847
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 23

SHELBY-CLEVELAND COUNTY RGNL (EHO)

RNP APCH.


▼

▲

Baro-VNAV NA when using Charlotte altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C. When local altimeter setting not received, use Charlotte altimeter setting and increase all DA 88 feet and all MDA 100 feet; increase LPV all Cats visibility ½ SM and LNAV/VNAV all Cats, LNAV Cat C/D visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct ZISUG and hold.

AWOS-3 118.425	CHARLOTTE APP CON 120.05 257.2	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

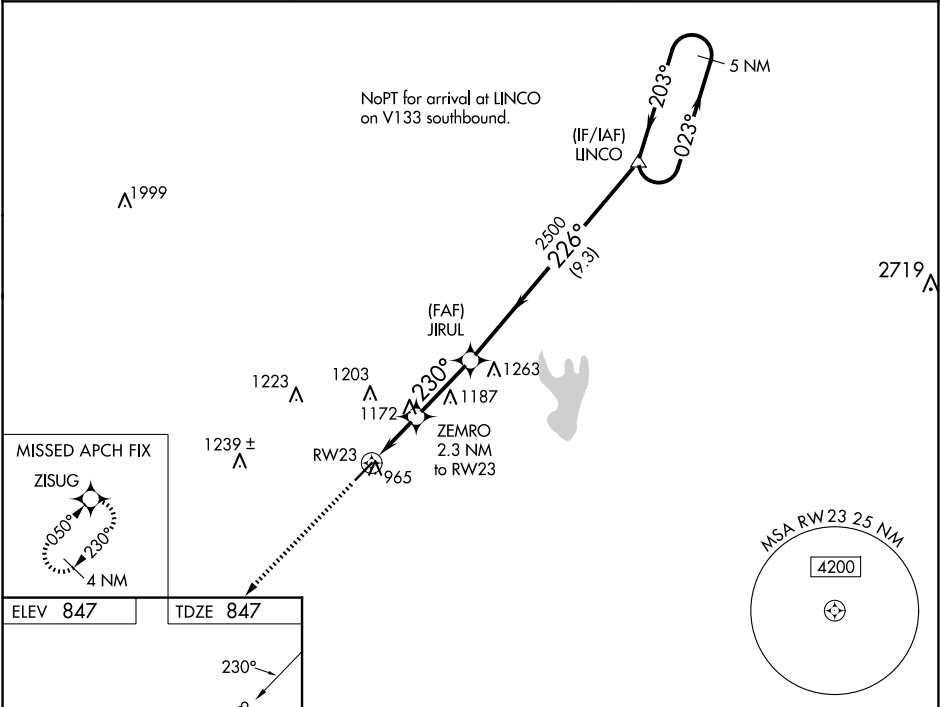

ELEV 847	TDZE 847	3000 ZISUG VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 28). 5 NM Holding Pattern ↑ ✧ * LNAV only. ZEMRO 2.3 NM to RW23 JIRUL 2500 LINCO 023° → 4000 ← 203° GP 3.00° TCH 40'			
230° 5001 X 100 5		2.3 NM 2.8 NM 9.3 NM			
CATEGORY	A	B	C	D	
LPV DA	1097-1 250 (300-1)				
LNAV/VNAV DA	1123-1 276 (300-1)				
LNAV MDA	1440-1	593 (600-1)	1440-1¾	593 (600-1¾)	