RNAV (GPS) RWY 34

ABERNATHY FLD (GZS)

WAAS	APP CRS		
CH **99725**	**335°**	Rwy Idg	**5010**
W34A		TDZE	**665**
		Apt Elev	**689**

RNP APCH - GPS.

NA Baro-VNAV NA when using Huntsville Exec Tom Sharp Jr Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 39°C (102°F). Night landing: Rwy 16 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Huntsville Exec Tom Sharp Jr Fld altimeter setting: increase LPV DA to 996 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1524 feet and all visibilities ¼ SM; increase all MDA 100 feet and visibility LNAV Cats C/D ⅛ SM and Circling Cats A/B ¼ SM and Cat C ½ SM. VDP NA with Huntsville Exec Tom Sharp Jr Fld altimeter setting.

MISSED APPROACH: Climb to 3000 direct WOZYE and hold.

AWOS-3	MEMPHIS CENTER	UNICOM
118.275	**125.85 379.25**	**122.8** (CTAF)

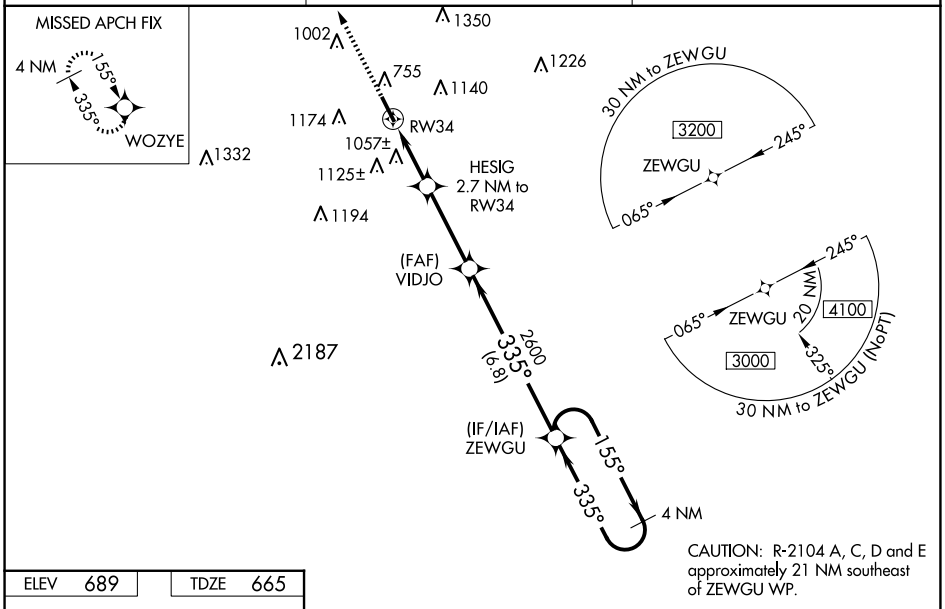

ELEV 689 TDZE 665

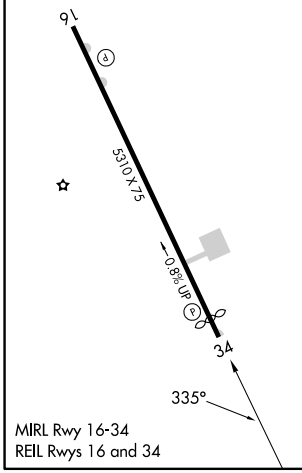

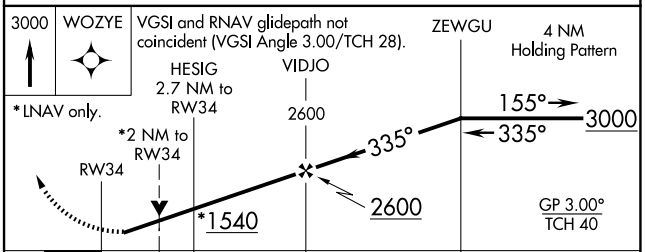

CATEGORY	A	B	C	D
LPV DA	915-1 250 (300-1)			
LNAV/VNAV DA	1443-2¾ 778 (800-2¾)			
LNAV MDA	1320-1 655 (700-1)		1320-1⅞ 655 (700-1⅞)	
CIRCLING	1420-1 731 (800-1)	1480-1 791 (800-1)	1480-2¼ 791 (800-2¼)	1640-3 951 (1000-3)

SE-1, 15 MAY 2025 to 12 JUN 2025
SE-1, 15 MAY 2025 to 12 JUN 2025