



WAAS CH 45722 W11A	APP CRS 110°	Rwy Idg 4876 TDZE 854 Apt Elev 871
----------------------------------------	------------------------	---------------------------------------------------------------

RNAV (GPS) RWY 11


LEBANON SPRINGFIELD-GEORGE HOERTER FLD (6I2)

RNP APCH.	<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. ▲ When local altimeter setting not received, use Danville altimeter setting and increase all DA 74 feet and all MDA 80 feet. Increase LPV, LNAV/VNAV, and Circling Cat D visibility ¼ mile and LNAV Cats C/D ⅓ mile. Baro-VNAV NA when using Danville altimeter setting.</p>	<p>MISSED APPROACH: Climb to 4000 direct WOBIL and hold, continue climb-in hold to 4000.</p>
-----------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------

AWOS-3P 119.725	LOUISVILLE APP CON 132.075 327.0	UNICOM 122.8 (CTAF) 0
---------------------------	--------------------------------------------	---------------------------------

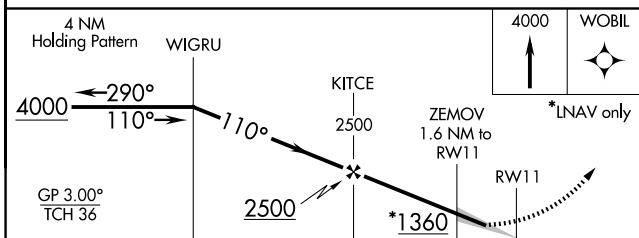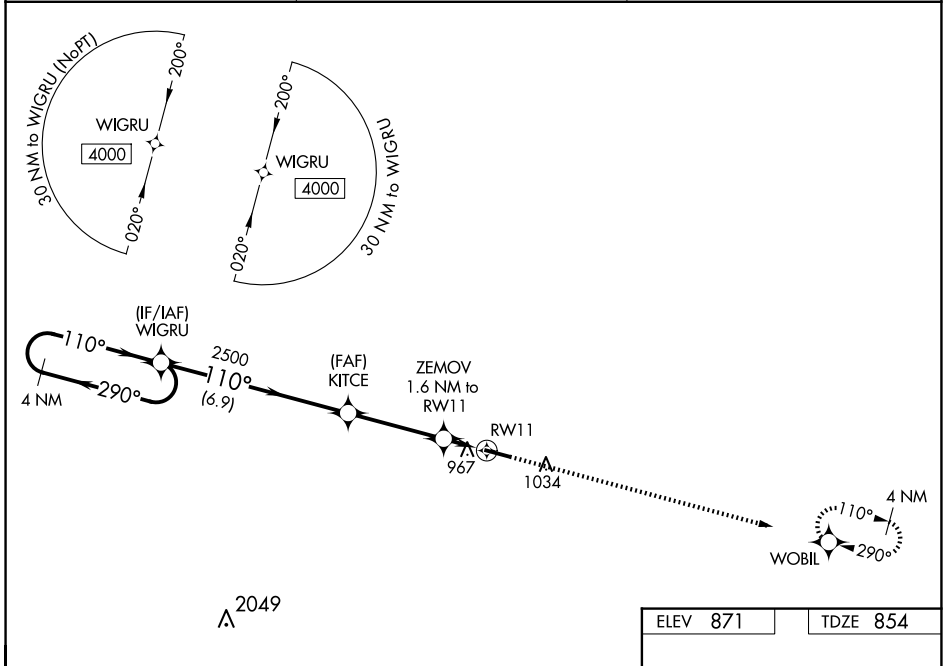

CATEGORY	A	B	C	D
LPV DA		1104-1	250 (300-1)	
LNAV/VNAV DA		1159-1½	305 (300-1½)	
LNAV MDA		1220-1	366 (400-1)	
C CIRCLING	1320-1 449 (500-1)	1340-1 469 (500-1)	1360-1½ 489 (500-1½)	1500-2 629 (700-2)

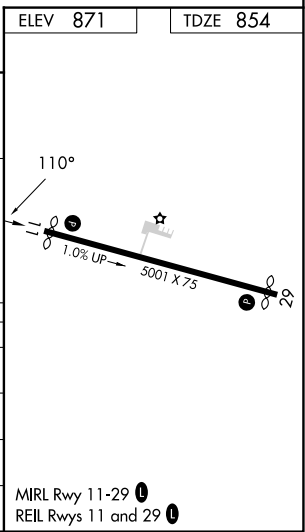

SE-1, 15 MAY 2025 to 12 JUN 2025

SE-1, 15 MAY 2025 to 12 JUN 2025

RNAV (GPS) RWY 11