RNAV (GPS) RWY 3

POINT HOPE (PHO) (PAPO)

WAAS	APP CRS	Rwy Idg	4000
CH 53347	030°	TDZE	21
W03A		Apt Elev	21

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Rwy 3 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using LUR/PALU altimeter setting. When local altimeter setting not received, use LUR/PALU altimeter setting and increase LPV DA to 303 feet; increase LNAV/VNAV DA to 353 feet; increase all MDAs 100 feet and LNAV visibility Cat C/D ⅛ SM.

MISSED APPROACH: Climb to 500 then climbing right turn to 3300 direct COPOX and hold.

AWOS-3P	ANCHORAGE CENTER	KOTZEBUE RADIO	CTAF
118.325	119.65 363.25	122.25	122.8 L

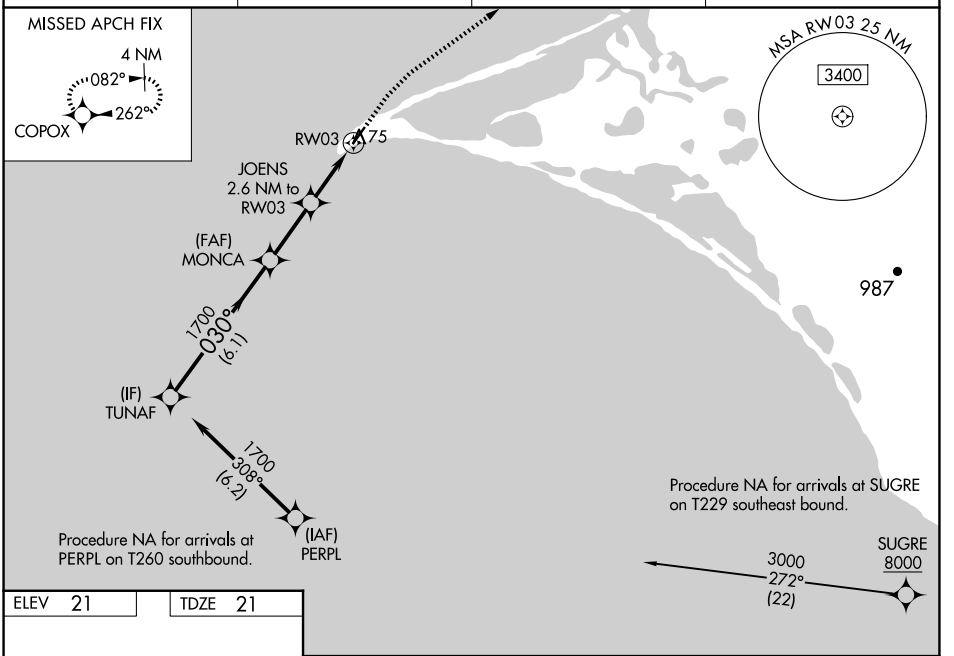

ELEV 21 TDZE 21

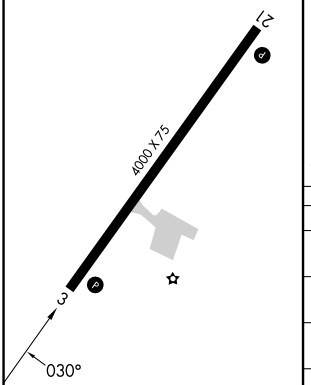

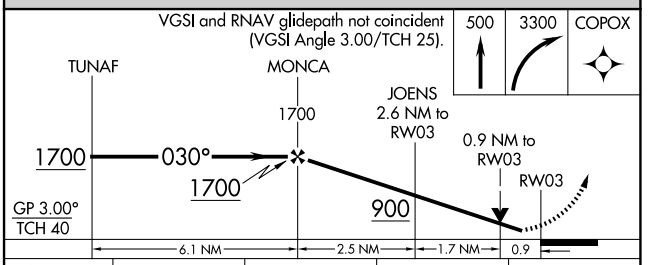

CATEGORY	A	B	C	D
LPV DA	221-1 200 (200-1)			
LNAV/VNAV DA	271-1 250 (300-1)			
LNAV MDA	340-1 319 (400-1)			
CIRCLING	380-1 359 (400-1)	480-1 459 (500-1)	480-1½ 459 (500-1½)	580-2 559 (600-2)

AK, 17 APR 2025 to 12 JUN 2025
AK, 17 APR 2025 to 12 JUN 2025