

WAAS CH 86640 W14A	APP CRS 144°	Rwy Idg TDZE Apt Elev	5000 18 18
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 14



PLATINUM (PTU)(PAPM)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Togiak altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Togiak altimeter setting: increase LPV DA to 371 feet; increase LNAV/VNAV DA to 424 feet and all Cats visibilities ¾ SM; increase all MDA 120 feet and increase LNAV and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 420 then Climbing right turn to 2500 direct FELTI and hold.

AWOS-3P 118.375	ANCHORAGE CENTER 124.2 251.1	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

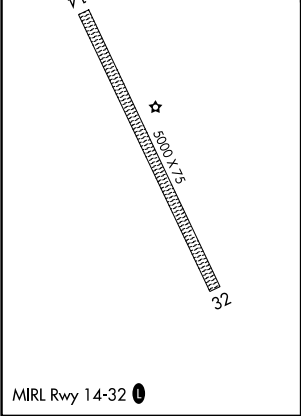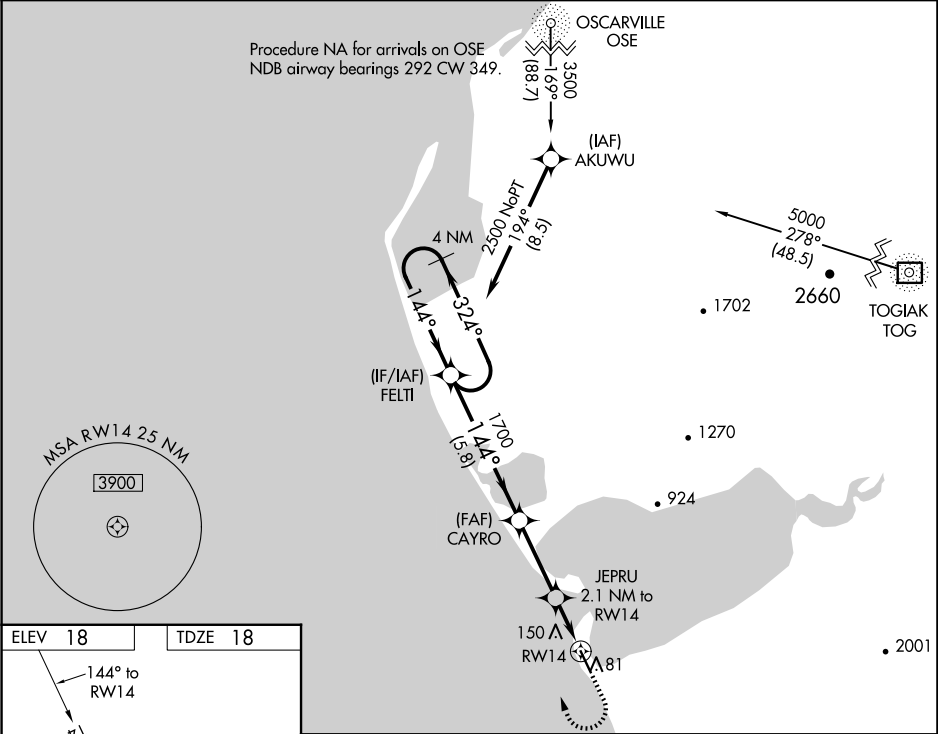

4 NM Holding Pattern FELTI				420	2500	FELTI
2500				JEPRU 2.1 NM to RW14		
GP 3.00° TCH 40				*1.1 NM to RW14		
5.8 NM				*720		
CATEGORY	A	B	C	D		
LPV DA	268-1 250 (300-1)			NA		
LNAV/VNAV DA	321-1 303 (400-1)			NA		
LNAV MDA	400-1 382 (400-1)		400-1 ¾ 382 (400-1 ¾)		NA	
CIRCLING	460-1 442 (500-1)	480-1 462 (500-1)	520-1 ½ 502 (600-1 ½)		NA	

AK, 17 APR 2025 to 12 JUN 2025

AK, 17 APR 2025 to 12 JUN 2025