

APP CRS	Rwy Idg	3000
122°	TDZE	13
	Apt Elev	18


RNAV (GPS) RWY 12

KIVALINA (KVL)(PAVL)

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Noatak altimeter setting and increase all MDAs 340 feet and LNAV Cat C visibility 1 SM and Circling Cat B visibility ¼ SM, Cat C 1 ¼ SM.

MISSED APPROACH: Climb to 3000 direct DINEC and hold.

ASOS	WTK/PAWN AWOS-3P	ANCHORAGE CENTER	KOTZEBUE RADIO	UNICOM
135.8	135.75	119.2 263.0	122.55	122.8 (CTAF) 0

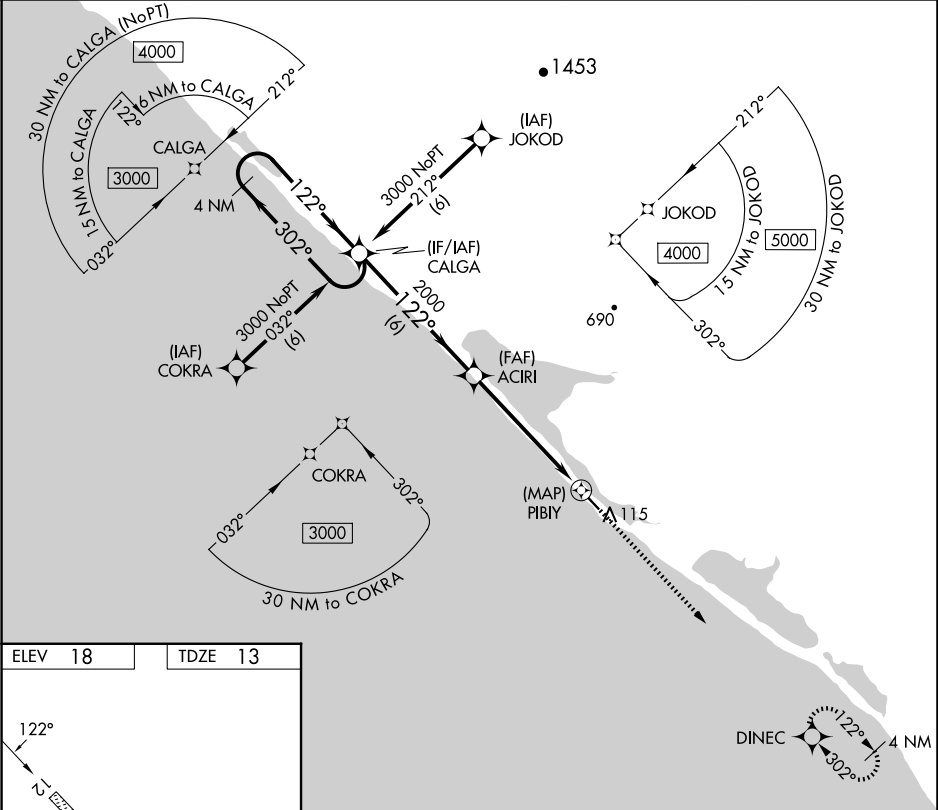

ELEV 18

TDZE 13

122°

3000 X 60

MIRL Rwy 12-30 0

4 NM Holding Pattern ←302° 122°→ CALGA ACIRI 3.06° TCH 40 PIBIY 3000 2000 6 NM 5.6 NM 0.4 3000 ↑ DINEC				
CATEGORY	A	B	C	D
LNAV MDA	340-1 327 (400-1)			NA
CIRCLING	440-1 422 (500-1)	560-1 542 (600-1)	560-1½ 542 (600-1½)	NA