


WAAS CH 63143 W25A	APP CRS 253°	Rwy Idg 4000 TDZE 175 Apt Elev 179
--	------------------------	---

RNAV (GPS) RWY 25

BOB BAKER MEML (IAN) (PAIK)

RNP APCH-GPS.	MISSED APPROACH: Climb to 900 then climbing left turn to 2900 direct KOBXU and hold. #Missed approach requires minimum climb of 335 feet per NM to 1440.
NA -28°C	Circling NA north of Rwy 7-25. Circling Rwy 7 NA at night. Baro-VNAV NA.

AWOS-3P 119.025	ANCHORAGE CENTER 119.2 263.0	CTAF 122.70
---------------------------	--	-----------------------

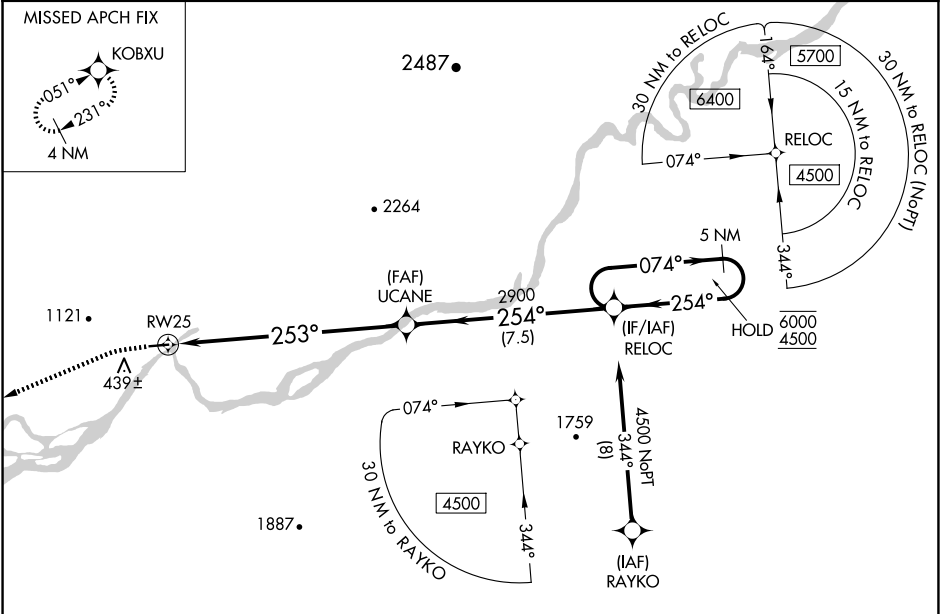

ELEV 179

TDZE 175

900

2900

KOBXU

*LNAV only

*4.9 NM to RW25

UCANE

RELOC

5 NM Holding Pattern

074°→ 6000

← 254° 4500

GP 3.00°

TCH 30

CATEGORY

A

B

C

D

LPV

DA#

450-1

275 (300-1)

LPV

DA

639-1³/₈

464 (500-1³/₈)

LNAV/VNAV

DA

807-1³/₄

632 (700-1³/₄)

LNAV

MDA

1740-1¹/₄

1565 (1600-1¹/₄)

1740-1¹/₂

1565 (1600-1¹/₂)

1740-3

1565 (1600-3)

C

CIRCLING

1740-1¹/₄

1561 (1600-1¹/₄)

1740-1¹/₂

1561 (1600-1¹/₂)

1740-3

1561 (1600-3)

4000 X 7.5

→ 0.8% UP

253°

25

1333

900

2900

KOBXU

RW25

253°

254°

2900

253°

254°

4.9 NM

3.7 NM

7.5 NM

MIRL Rwy 7-25

REIL Rwy 25