

APP CRS	Rwy ldg	5927
047°	TDZE	619
	Apt Elev	620

RNAV (RNP) Y RWY 4R



CHICAGO MIDWAY INTL (MDW)

RNP AR APCH - GPS.



▼ For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON	CLNC DEL	CPDLC
132.75	128.2 353.875	135.2 269.125	118.075	124.625	

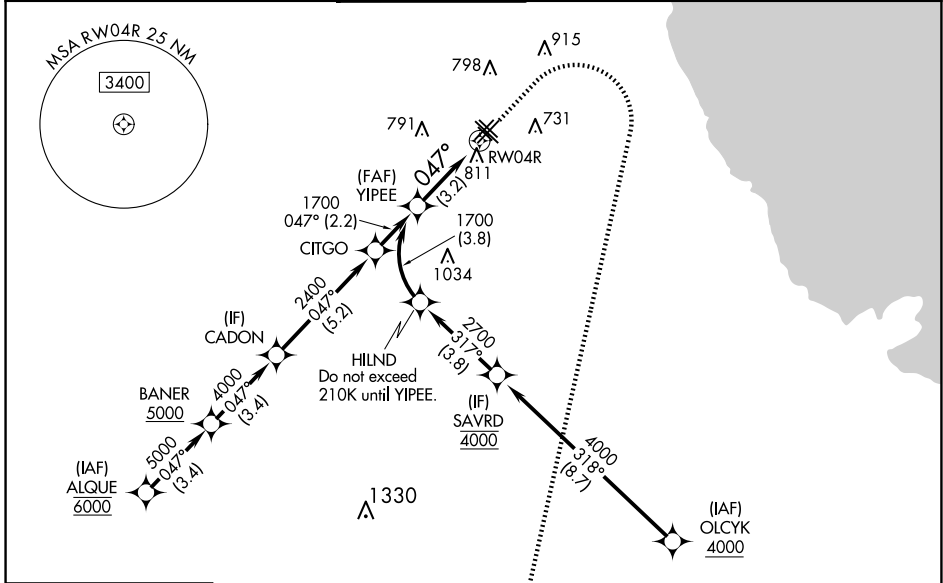

ELEV 620	D	TDZE 619
HIRL Rwy 4R-22L and 13C-31C		
MIRL Rwy 4L-22R, 13L-31R, and 13R-31L		
REIL Rwy 4R, 22L, and 31C		
RLS Rwy 13C and 31C		

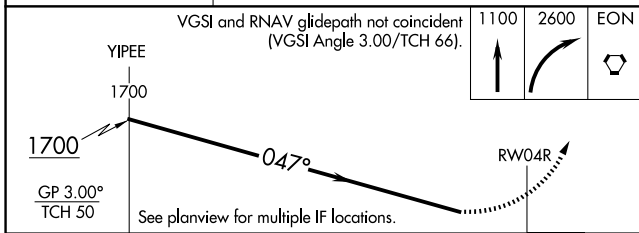

CATEGORY	A	B	C	D
RNP 0.10 DA		951/50	332 (400-1)	
RNP 0.20 DA		1020/60	401 (400-1¼)	
RNP 0.30 DA		1077-1⅜	458 (500-1⅝)	

AUTHORIZATION REQUIRED

EC-3, 15 MAY 2025 to 12 JUN 2025

EC-3, 15 MAY 2025 to 12 JUN 2025