

LAS VEGAS, NEVADA

HI-ILS or LOC Z RWY 21L

LOC I-DIQ 109.1	APCH CRS 209°	Rwy Idg	21L	21R
		TDZE	10,051	10,120
		Arprt Elev	1865	1869

- (USAF)

NELLIS AFB (KLSV)


DME or RADAR required.

▼ * When ALS inop, increase RVR to 40, vis to 3/4 mile.
 ** When ALS inop, increase vis to 1 3/8 miles.



MISSED APPROACH: Climb to 15,000, intercept LSV TACAN R-210 to 2.5 DME (ROCKX), then climbing right turn heading 043° to intercept LSV R-358 to ARCOE and hold, climb in hold to 15,000. Missed approach not for civil use.

ATIS 270.1	APP CON 124.95 273.55	TOWER 132.55 327.0	GND CON 121.8 275.8	CLNC DEL 120.9 289.4
----------------------	---------------------------------	------------------------------	-------------------------------	--------------------------------

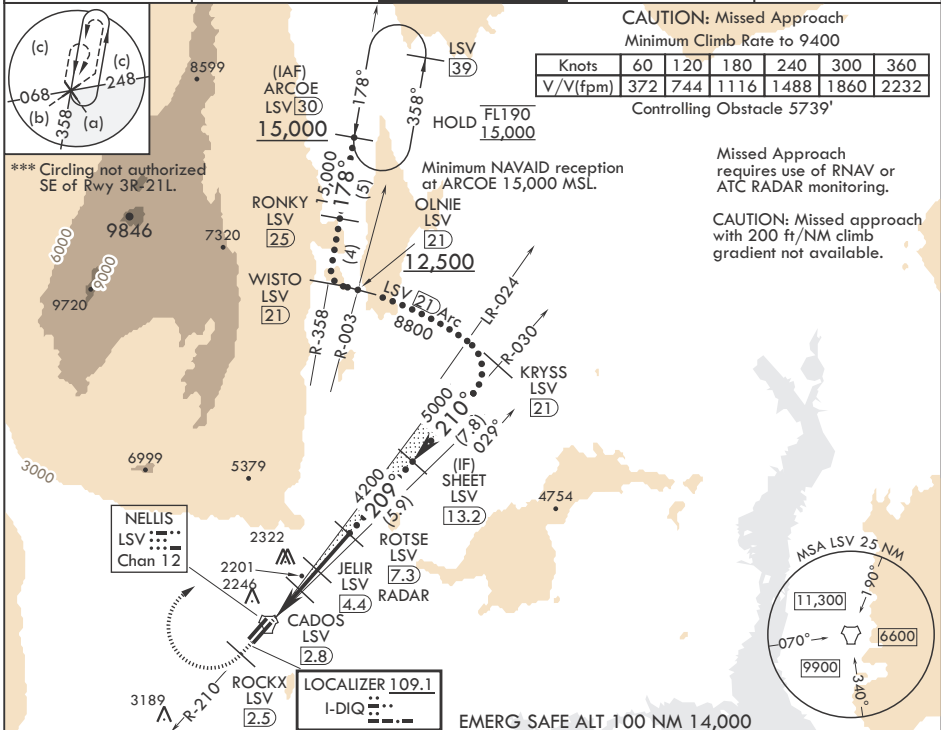

CAUTION: Missed Approach
Minimum Climb Rate to 9400

Knots	60	120	180	240	300	360
V/V(ft/min)	372	744	1116	1488	1860	2232



Controlling Obstacle 5739'

Missed Approach requires use of RNAV or ATC RADAR monitoring.
 CAUTION: Missed approach with 200 ft/NM climb gradient not available.

SW-4, 15 MAY 2025 to 12 JUN 2025

SW-4, 15 MAY 2025 to 12 JUN 2025

15,000 LSV	ROCKX LSV 2.5	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 54).	ROTSE LSV 7.3 RADAR	SHEET 13.2 Intcp Lczr	ELEV 1869	TDZE 21L 1865	TDZE 21R 1869
------------	---------------	---	---------------------	-----------------------	-----------	---------------	---------------

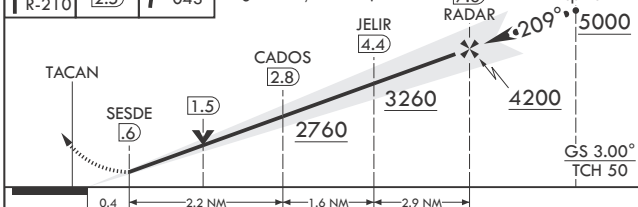

CATEGORY	C	D	E
S-ILS 21L*	2065/24	200	(200-1/2)
S-LOC 21L**	2360/50	495	(500-1)
SIDESTEP 21R	2380-1 3/8	511	(600-1 1/4)
☐ CIRCLING***	2560-2 691 (700-2)	2840-3 971 (1000-3)	3140-3 1271 (1300-3)

HIRL all Rwys

FAF to MAP 6.7 NM					
Knots	120	140	160	180	200
Min:Sec	3:21	2:52	2:31	2:14	2:01

LAS VEGAS, NEVADA

36°14'N - 115°02'W

NELLIS AFB (KLSV)

Amdt 10 10AUG23

HI-ILS or LOC Z RWY 21L