

LOC I-GZX 109.9	APP CRS 129°	Rwy Idg 9604
		TDZE 636
		Apt Elev 661

ILS or LOC RWY 13

GENERAL DOWNING - PEORIA INTL (PIA)

ADF required for missed approach.



- ▼** For inoperative MALSR, increase S-LOC 13 Cat C/D visibility to 1½ mile.
- ▲** Circling Rwy 13, 31 NA at night.
- RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR




MISSED APPROACH: Climb to 2500 direct PI LOM and hold.

ATIS 126.1 282.2	SAINT LOUIS APP CON 125.8 269.2	PEORIA TOWER 124.0 353.85	GND CON 121.85 348.6	CLNC DEL 124.675 317.55
----------------------------	---	-------------------------------------	--------------------------------	-----------------------------------

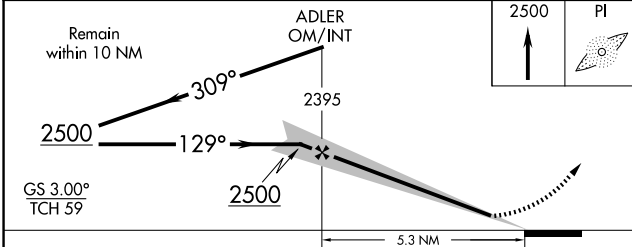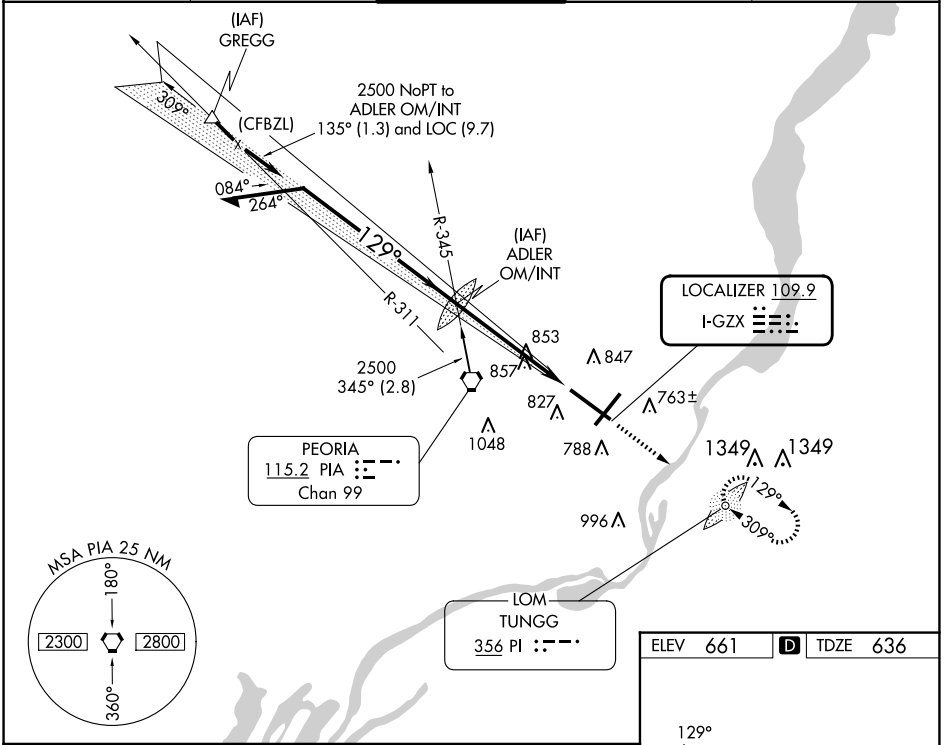

ELEV 661	D TDZE 636
----------	-------------------

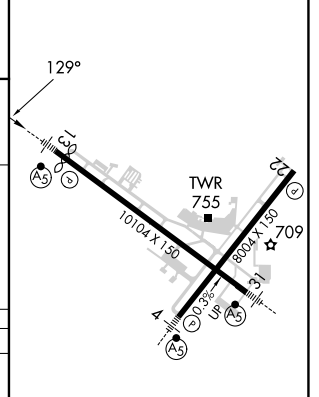

CATEGORY	A	B	C	D
S-ILS 13	*836/24		200 (200-½)	
S-LOC 13	1120/24	484 (500-½)	1120/50	484 (500-1)
C CIRCLING	1160-1	499 (500-1)	1180-1½ 519 (600-1½)	1400-2¼ 739 (800-2¼)

HIRL Rwy 4-22 and 13-31					
FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46