

APCH CRS	Rwy Idg	N/A
352°	TDZE	N/A
	Arpt Elev	843

[USA]

WHEELER AAF (PHHI)

RNP APCH - GPS
DME required

T *Circling to Rwy 24 not authorized at night.
Circling not authorized N Rwy 6-24 when class D surface area is VFR.

MISSED APPROACH: (Do not exceed 220 KIAS until initial turn completion.) Climbing right turn to 6000 direct HNL VORTAC, track 171° to ALANA and hold.


ATIS
119.675 242.4

HCF APP CON
118.3 269.0

TOWER ★
126.3 (CTAF) 235.625

GND CON
41.5_{FM} 121.85 237.5

Knots	60	120	180	240	300	360
V/V(fpm)	295	590	885	1180	1475	1770
Min climb of 295 ft/NM to 3000 - Controlling Obstacle 1611						

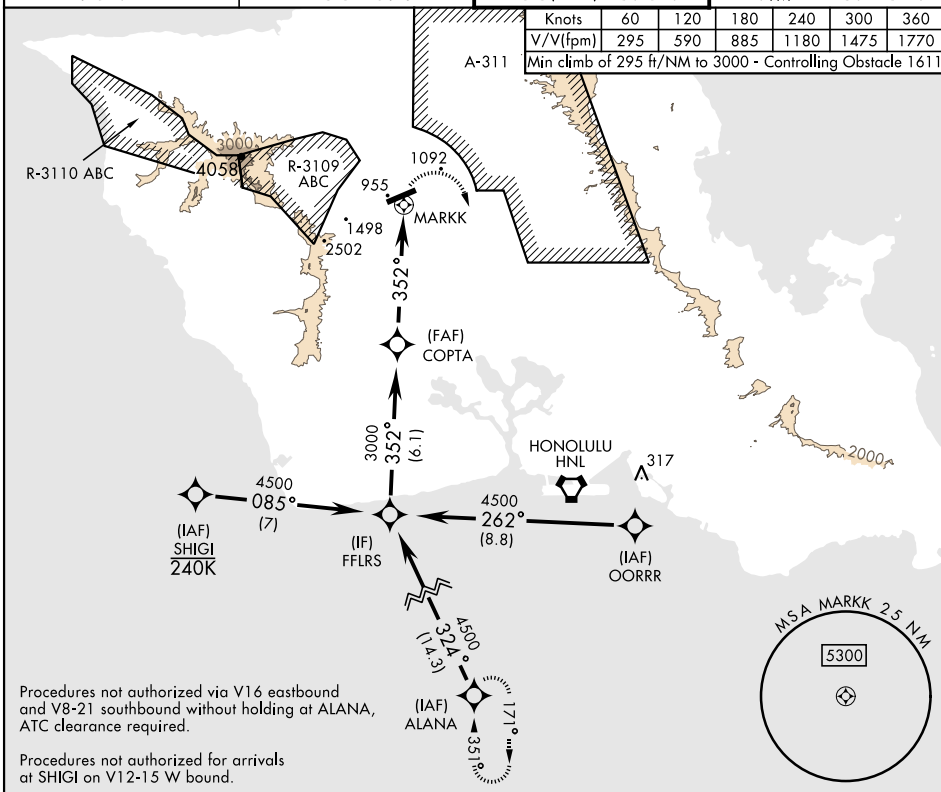

When local altimeter not received use
HNL INTL altimeter setting and minimums.



6000

HNL

ALANA

ELEV	843
------	-----

Rwy 6 lda 5038'

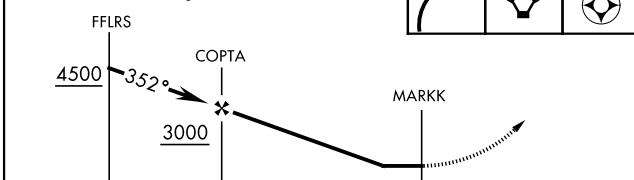

		← 5 NM →			
CATEGORY	A	B	C	D	
CIRCLING *	1400-1	1800-1½	2820-3	NOT	
	557 (600-1)	957 (1000-1½)	1977 (2000-3)	AUTHORIZED	
DANIEL K. INOUE INTL ALTIMETER MINIMUMS					
CIRCLING *	1560-1	1960-1½	2980-3	NOT	
	717 (800-1)	1117 (1200-1½)	2137 (2200-3)	AUTHORIZED	

MIRL Rwy 6-24

WAHAWA, OAHU |, HAWAII

21° 29'N-158° 02'W

WHEELER AAF (PHHI)

Amdt 1 07SEP23

RNAV (GPS)-C

PAC, 17 APR 2025 to 12 JUN 2025

PAC, 17 APR 2025 to 12 JUN 2025