

APP CRS	Rwy Idg	9007
020°	TDZE	2966
	Apt Elev	2977


RNAV (RNP) Y RWY 2

GLACIER PARK INTL (GPI)

RF and GPS required. Missed approach requires RNP less than 1.0.
 For uncompensated Baro-VNAV systems, procedure NA below -21°C (-5°F) or above 43°C (109°F). For inoperative MALS increase RNP 0.10* visibility to 1/4 and RNP 0.30 visibility to 2.
 *Missed approach requires minimum climb of 220 feet per NM to 6100.

MALS
 MISSED APPROACH: Climb to 10000 via left turn to JOGAD, and via left turn to TONYU, and via 121° track to WILTO and via 129° track to ANGL and hold.

ATIS 132.625	SALT LAKE CENTER 127.075 244.875	GLACIER TOWER ★ 124.55 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	--	---	-------------------------	-------------------------

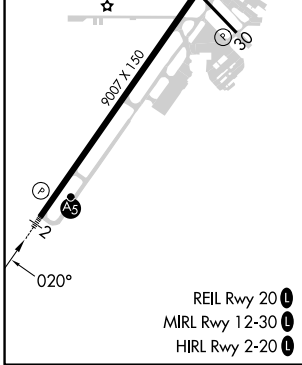

Procedure Turn NA	JUNRU	WULEX	AVDIH	10000	JOGAD	ROYOG
GP 3.00°	8000	7200	6200	5200	RW02	
TCH 51						
	3 NM	3.2 NM	7.1 NM	6.7 NM		
CATEGORY	A	B	C	D		
RNP 0.10 DA*	NA		3340-3/4	374 (400-3/4)		
RNP 0.30 DA	NA		3522-1 1/2	556 (600-1/2)		

AUTHORIZATION REQUIRED

NW-1, 15 MAY 2025 to 12 JUN 2025

NW-1, 15 MAY 2025 to 12 JUN 2025