WAAS CH **99703** **W31A**	APP CRS **315°**	Rwy Idg **9300** TDZE **581** Apt Elev **607**

RNAV (GPS) Y RWY 31L

DALLAS-FORT WORTH INTL (DFW)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 31R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 3000 direct HODAX and on track 306° to KAGLE and hold.

D-ATIS	LONE STAR APP CON	DFW TOWER	GND CON	CLNC DEL	CPDLC
ARR **123.775** DEP **135.925**	**118.425 127.075 119.4**	**126.55 127.5** EAST **124.15 134.9** WEST	**121.65 121.8** EAST **121.85** WEST	**128.25**	

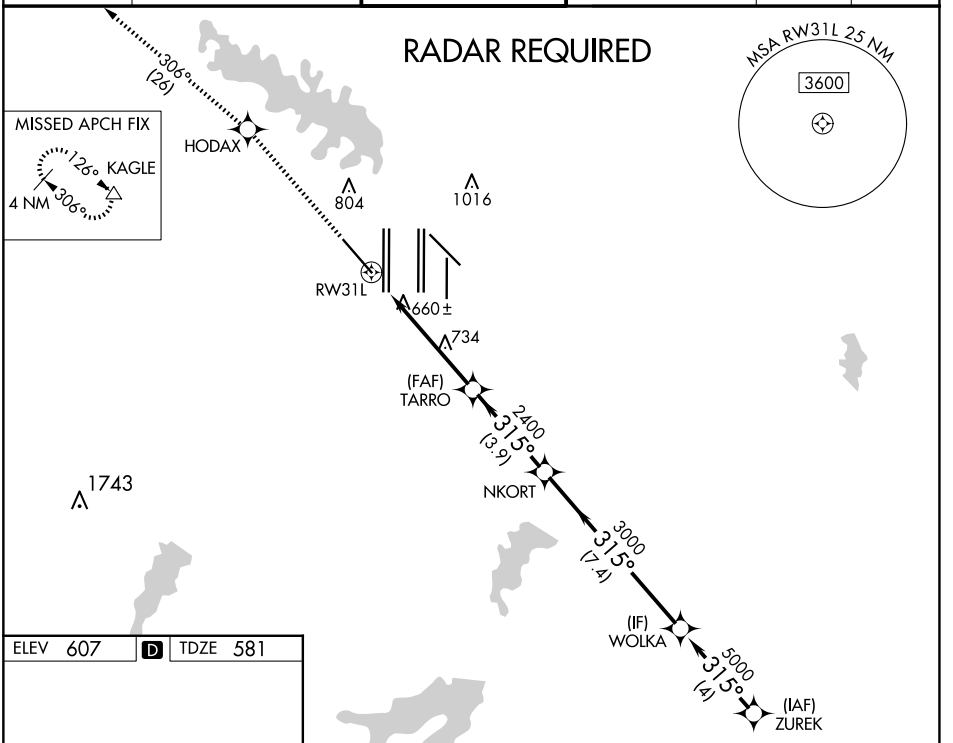

ELEV 607 | D | TDZE 581



HIRL all Rwys
REIL Rwys 13L and 31L
TDZ/CL all Rwys except 13L and 31L

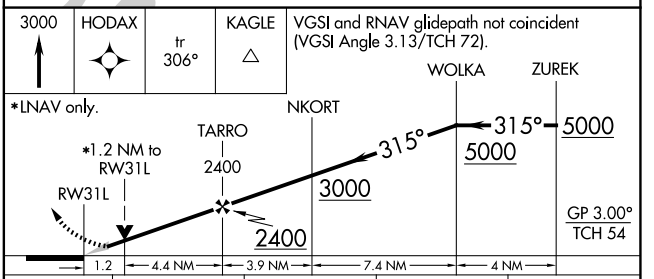

CATEGORY	A	B	C	D
LPV DA		831/40	250 (300-¾)	
LNAV/VNAV DA		907/50	326 (400-1)	
LNAV MDA	1060/55	479 (500-1)	1060-1⅜	479 (500-1⅜)

SC-2, 15 MAY 2025 to 12 JUN 2025
SC-2, 15 MAY 2025 to 12 JUN 2025